



Load capacity: 125 kN test load EN 124

Material: Frame and cover in 2 mm cold-formed precision steel profiles. Hot-dip galvanised.

Features: Accurately manufactured sealed access covers. Tapered design allows easy opening. Virtually invisible when installed. EPDM seal. Robust steel mesh reinforcement.

The Lift-Off opening system: Every HAGODECK Type BV steel cover comes with a set of lifting keys and precise installation instructions. The **HAGO advantage:** jammed covers are released by simply turning the Golden Key.

Applications: Inside buildings or their surroundings, where sealed covers are required.

Installation: Installation must be carried out according to our instructions. With water-tight models, care must be taken to seal the outer frame into the surrounding flooring.

Specification clause: www.hago.at



BV over a manhole




BV partially filled with tiles



BV in a cafe floor with a granite finish

BV steel

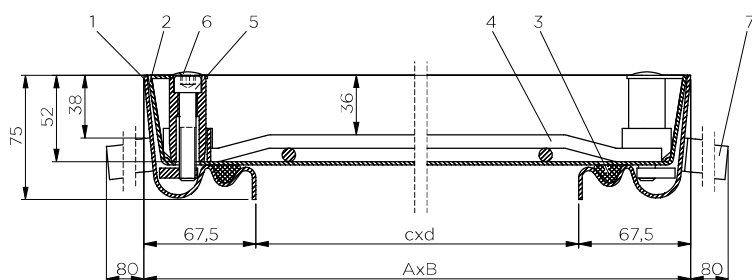

- | | | |
|---------|-----------------|----------|
| 1 Frame | 4 Reinforcement | 7 Anchor |
| 2 Cover | 5 Allen screw | |
| 3 Seal | 6 Plastic cap | |

Type	Clear dimensions of shaft (≈ cm)	Outside dimensions (≈ cm)	Weight empty approx.	S / O*
	c x d	A x B		
BV 33	30 x 30	43,5 x 43,5	10 kg	S
BV 44	40 x 40	53,5 x 53,5	14 kg	S
BV 45	45 x 45	58,5 x 58,5	16 kg	S
BV 55	50 x 50	63,5 x 63,5	17 kg	S
BV 64	60 x 40	73,5 x 53,5	17 kg	S
BV 66	60 x 60	73,5 x 73,5	21 kg	S
BV 635	63,5 x 63,5	77,0 x 77,0	23 kg	S
BV 77	70 x 70	83,5 x 83,5	27 kg	S
BV 86	80 x 60	93,5 x 73,5	26 kg	S
BV 88	80 x 80	93,5 x 93,5	31 kg	S
BV 106	100 x 60	113,5 x 73,5	30 kg	S
BV 108	100 x 80	113,5 x 93,5	36 kg	S
BV 110	100 x 100	113,5 x 113,5	42 kg	S

Cover depth = 5,0 cm

Installation height = 7,5 cm

Special sizes possible

*S = available from stock

*O = to order