



Load capacity: 125 kN test load (EN 124) when filled with a min. 5 cm layer of grade C 35/45 concrete (EN 206)

Material: Frame and cover made of, hot-dip galvanized steel or stainless steel grade 304 (also available in grade 316 on request).

Features: Sealed cover with 10 cm deep recess. Virtually invisible when installed. EPDM seal. Robust steel mesh reinforcement, crosswise welded. Opening tool included.

The Lift-Off opening system: Every HAGODECK Type BVH-maxi steel cover comes with a set of lifting keys and clear installation instructions. **The HAGO advantage:** jammed covers are released by simply turning the Golden Key.


Applications: Inside buildings and their surroundings. Especially for those installations where the cover is to be filled with concrete slabs, bricks, paviors etc.

Installation: Installation must be carried out according to our instructions. With water-tight models, care must be taken to seal the outer frame into the surrounding flooring.

Specification clause: www.hago.at



BVH-maxi steel/BVEH-maxi stainless steel

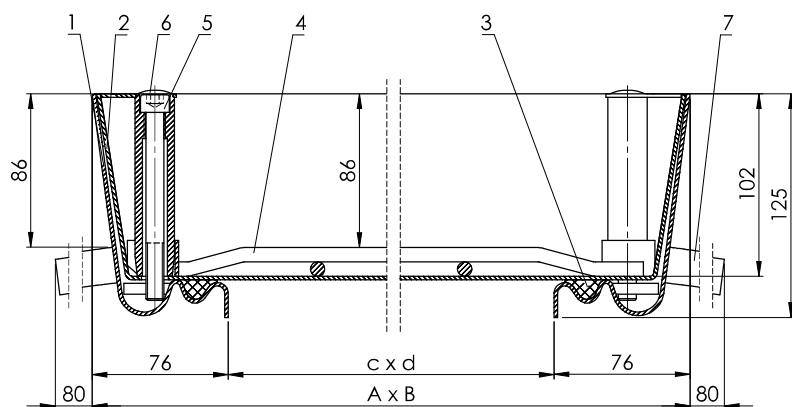

- | | | |
|---------|-----------------|----------|
| 1 Frame | 4 Reinforcement | 7 Anchor |
| 2 Cover | 5 Allen screw | |
| 3 Seal | 6 Plastic cap | |

Type	Clear dimensions of shaft (≈ cm)	Outside dimensions (≈ cm)	Weight empty approx.	S / O*
Galvanised steel				
BVH maxi 33	30 x 30	45,2 x 45,2	15 kg	O
BVH maxi 44	40 x 40	55,2 x 55,2	18 kg	S
BVH maxi 55	50 x 50	65,2 x 65,2	22 kg	S
BVH maxi 64	60 x 40	75,2 x 55,2	22 kg	O
BVH maxi 66	60 x 60	75,2 x 75,2	27 kg	S
BVH maxi 77	70 x 70	85,2 x 85,2	33 kg	S
BVH maxi 86	80 x 60	95,2 x 75,2	32 kg	S
BVH maxi 88	80 x 80	95,2 x 95,2	38 kg	S
BVH maxi 106	100 x 60	115,2 x 75,2	37 kg	S
BVH maxi 108	100 x 80	115,2 x 95,2	44 kg	O
BVH maxi 110	100 x 100	115,2 x 115,2	50 kg	S
Stainless steel				
BVEH maxi 33	30 x 30	45,2 x 45,2	14 kg	O
BVEH maxi 44	40 x 40	55,2 x 55,2	17 kg	O
BVEH maxi 55	50 x 50	65,2 x 65,2	21 kg	O
BVEH maxi 64	60 x 40	75,2 x 55,2	21 kg	O
BVEH maxi 66	60 x 60	75,2 x 75,2	25 kg	S
BVEH maxi 77	70 x 70	85,2 x 85,2	32 kg	O
BVEH maxi 86	80 x 60	95,2 x 75,2	30 kg	O
BVEH maxi 88	80 x 80	95,2 x 95,2	36 kg	S
BVEH maxi 106	100 x 60	115,2 x 75,2	36 kg	O
BVEH maxi 108	100 x 80	115,2 x 95,2	42 kg	O
BVEH maxi 110	100 x 100	115,2 x 115,2	47 kg	O

Cover depth ≈ 10.2 cm

Installation height ≈ 12.5 cm

Special sizes possible

*S = available from stock

*O = to order