

DALLMER

Drainage systems.
Since 1913

09/2025

Shower channel system
DallFlex 2.0

01	Introduction	Page 05
02	Drain bodies	Page 15
03	Shower channels	Page 21
04	Order overview	Page 63
05	Product range	Page 71
06	Service	Page 106

01

Introduction

Page 05



"We are an innovative company – but we're also one big family."

Harry Bauermeister,
Managing Director

The Dallmer family business is now in its fourth generation. And even if over the decades times have changed drastically, and along with it the production processes, one thing has remained the same: All Dallmer products are developed, designed and manufactured using state-of-the-art technology in Germany – more specifically, in Arnsberg. The "Made in Germany" seal of quality applies without reservations.

Investing in the future. Dallmer does not only invest money in state-of-the-art machine technology, but also in training and further education for its employees. This ensures that there is specialist know-how at the location.

Bringing together strengths. In order to produce drainage solutions which set standards, you need a genuine innovative spirit and a high degree of experience – and state-of-the-art technology.

Every detail counts. Quality is our top priority. If we all work towards this same goal, we are capable of meeting even the highest demands.





Headquarters in
Arnsberg



3191

The DallFlex system family: Individuality as standard

Stylistic and functional,
the fitting solution for every
structural situation

Construction practices are modifying: thinner coverings, quicker construction times, increasing requirements on workmanship. We have responded to these requirements by taking another close look at our proven DallFlex system and further developing it – together with the installation engineers who work with our products every day. Whether trowelled thin-layer floor coatings, tiles and ceramic coverings from 6 mm or natural stone – DallFlex 2.0 provides the right solution for every application. A reduced variety of parts and optimized details increase installation reliability and shorten installation time.

Flush-in-floor or front-of-wall installation? With its wide selection of designs, our system provides a variety and flexibility for every area of application that no other drainage system can offer to date. Always tailored to individual standard.

Do you prefer something budget-friendly and well-designed?
The Pure models are our budget-friendly design variants.

Do you value individual design freedom?
Our Individual line offers customisable shower channels that are virtually invisible.

Do you prefer a minimalist design?
The CeraFrame Liquid Neo model offers a shower channel solution for thin-layer floor coating systems.

Do you need something more exclusive?
Select comprises accentuated premium models made of solid stainless steel.

Variety makes all the difference. Stylistic and functional.
Dive into the world of DallFlex 2.0.

Discover the DallFlex 2.0 system:
dallmer.com/dallflex



You might also be interested in: The DallDrain point drain for floor drainage. Installation technicians are provided with an assembly-friendly, highly flexible floor drain for drainage of all sealed surfaces, for example in the bathroom, spa and cellar.

Discover the DallDrain-system:
dallmer.com/dalldrain



CeraFloor Select
Matt stainless steel

The simplest form of cleaning

The drainage system for perfect hygiene

- Completely removable trap for easy and thorough cleaning
- Easy and direct access to the drain area
- No concealed dirt-traps thanks to the flush-mounted and exposed water path

Discover how easy it is to clean
DallFlex 2.0:





CeraFloor Select
Matt stainless steel

Drain bodies

Order overview from page 64
Product range from page 72



DallFlex 2.0 115 Page 16



DallFlex 2.0 Page 16



DallFlex 2.0 Plan Page 16



DallFlex 2.0 vertical Page 16



CeraFlex Page 18



CeraFlex Plan Page 18



CeraFlex vertical Page 18

Shower channels

Order overview from page 64
Product range from page 83

For the wall



CeraWall Select
Solid & high-grade
5 mm, solid

Page 22



CeraWall Individual
Discreet and customisable

Page 26



CeraWall Pure
Affordable & functional
1.5 mm, edged

Page 30

For in-floor and front-of-wall installation



CeraFloor Select
Solid & high-grade
6 mm, solid

Page 34



CeraFloor Individual
Discreet and customisable

Page 38



CeraFloor Pure
Affordable & functional
1.5 mm edged

Page 42

For in-floor installation



Zentrix
Compact & stylish

Page 46




CeraNiveau
Elegant & design-oriented

Page 50



CeraFrame Individual
Creative & flexible

Page 54

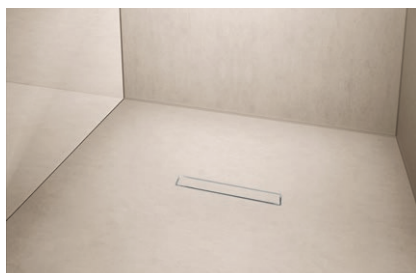

CeraFrame Liquid Neo
Seamless & reliable

Page 58

Compatibility with liquid and sheet sealants

For the DallFlex and DallDrain system families, we provide a General Building Supervisory Authority Test Certificate (abP) or the manufacturer's approval regarding compatibility with the liquid sealants and sheet sealants for a large number of manufacturers. Tried-and-tested combinations: Quick and reliable.

Advantages

One system, more than ten suitable shower channels. DallFlex 2.0 offers stylish and easy-to-install solutions for virtually every structural situation.

- Almost endless possibilities – from trowelled thin-layer floor coatings to ceramic tile coverings from 6 mm to natural stone
- Very simple cleaning for optimum hygiene
- Functional and elegant, thanks to customisable precision-fit option
- Reliable waterproofing with tool-free click-in DallFlex 2.0 sealing sleeve
- Sophisticated product details, such as subsequent fine-positioning in all horizontal directions
- Multi-award-winning design

Botament[®]

Sopro

SAKRET

oxiegen

Schlüter
Systems

SCHÖNOX

SCHOMBURG

MAPEI

ARDEX

Kiesel

PCI

Fire protection for added safety

If a building catches fire, its vertical floor drains need to be professionally secured so that the fire does not spread via the drainage pipes. The solution: Our fire-insulating structural elements contain the spread of fire reliably if the worst happens, ensuring maximum safety.

Sound insulation for better quality of living

The right sound insulation ensures a better quality of living, and a better quality of life. Our shower channels and drain systems for level-access showers are designed to meet this requirement. The integrated Dallmer sound insulation element reduces the noise made by the drain's functions and significantly insulates footfall sound. This has been confirmed by the Fraunhofer Institute for Building Physics, with the increased sound insulation requirements under DIN 4109 and VDI 4100 being comprehensively fulfilled.

Further information is available at
dallmer.com/fire-insulation
dallmer.com/sound-insulation

DALLMER

FIRE
PROTECTION
SYSTEMS

DALLMER

SOUND
PROTECTION
SYSTEMS

02

Drain bodies


Page 15

DallFlex 2.0

Order overview from page 64

Product range page 72

The original now even better.

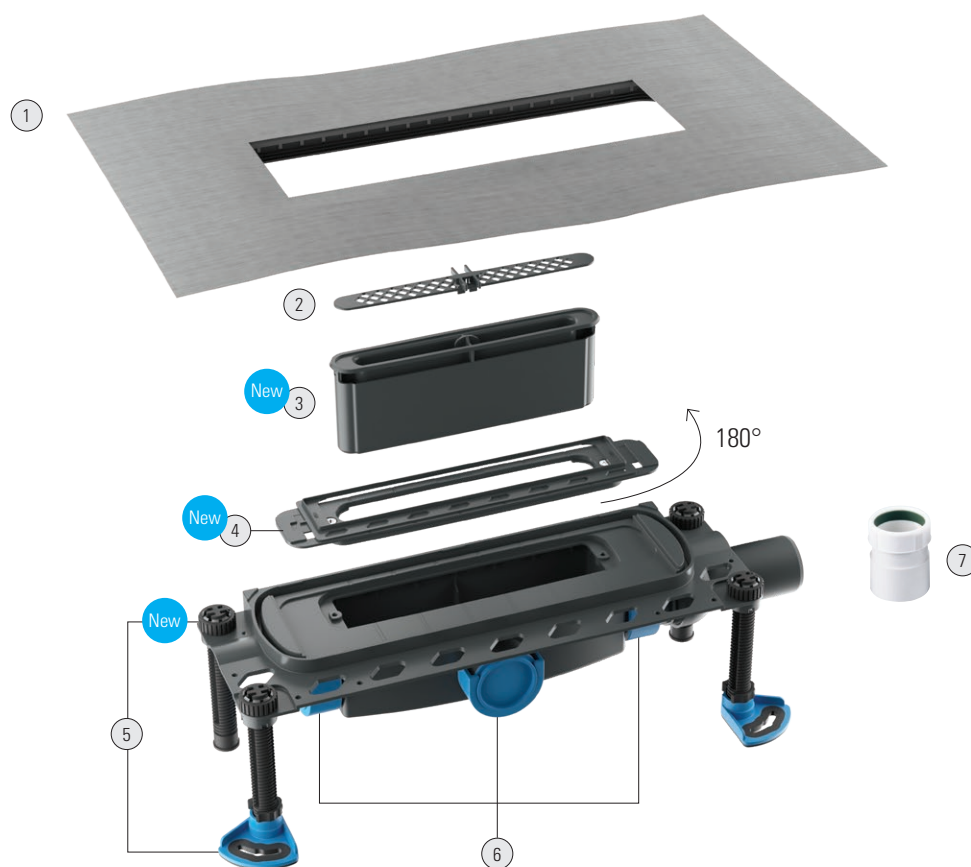

Variants

DallFlex 2.0
115

DallFlex 2.0

DallFlex 2.0
Plan

DallFlex 2.0
vertical

Build-in height	115 mm	90 mm	65 mm	45 mm
Flow rates	0,5–2,35 l/s*			
Comfort	Certified sound insulation conforming to DIN 4109 and VDI 4100			
Advantages	– Compatible with all shower channels in the DallFlex system family – Dallmer fire protection element DN 50, suitable for DallFlex 2.0 vertical drain body			

*Depending on the drain version and connection type.




New:
for tile and
ceramic coverings
from 6 mm

This is new

- ① Flexible, crease-free and click-in sealing sleeve for secure connection to bonded waterproofing conforming to DIN 18534
 - ② Hair trap included in the scope of delivery
 - New ③ Completely removable odour trap with water seal, optionally available as mechanical odour trap
 - New ④ Installation unit with integrated positioning aid for precise positioning of the shower channels
 - New ⑤ Acoustically decoupled, height-adjustable mounting feet, with quick-release system
 - ⑥ Tool-free positioning of drain outlet on three sides, ball-joint for tension-free connection to the wastewater pipe
 - ⑦ DN 40 or DN 50 compression joint with solvent weld socket British Standard
 - ⑧ DallFlex 2.0 115 with particularly high flow rate
 - ⑨ DallFlex 2.0 for the most common installation situations
 - ⑩ DallFlex 2.0 Plan for low floor constructions
 - ⑪ DallFlex 2.0 vertical for connection to the wastewater pipe through the bare concrete ceiling
- Almost endless possibilities – from trowelled thin-layer floor coatings to ceramic tile coverings from 6 mm to natural stone
 - Factory pre-assembled installation unit:
 - Integrated positioning aid: Flexible and secure positioning of the shower channel for correct alignment with wall and floor coverings at all times
 - This guarantees: Free access to the odour trap and wastewater pipe – easy cleaning and maintenance at any time
 - Maximum creative freedom: frame can be rotated through 180° for variable covering thicknesses – even acc. to installation in the screed structure
 - The quick-release system enables effortless pre-setting and precise height adjustment of the fixable threaded rod – ideal for adapting to the floor construction
 - Mechanical odour trap: works with a magnetic closing mechanism without sealing water. Prevents odour annoyance from sewer gases permanently and safely. Optionally available.

Installation video:
dallmer.com/installation



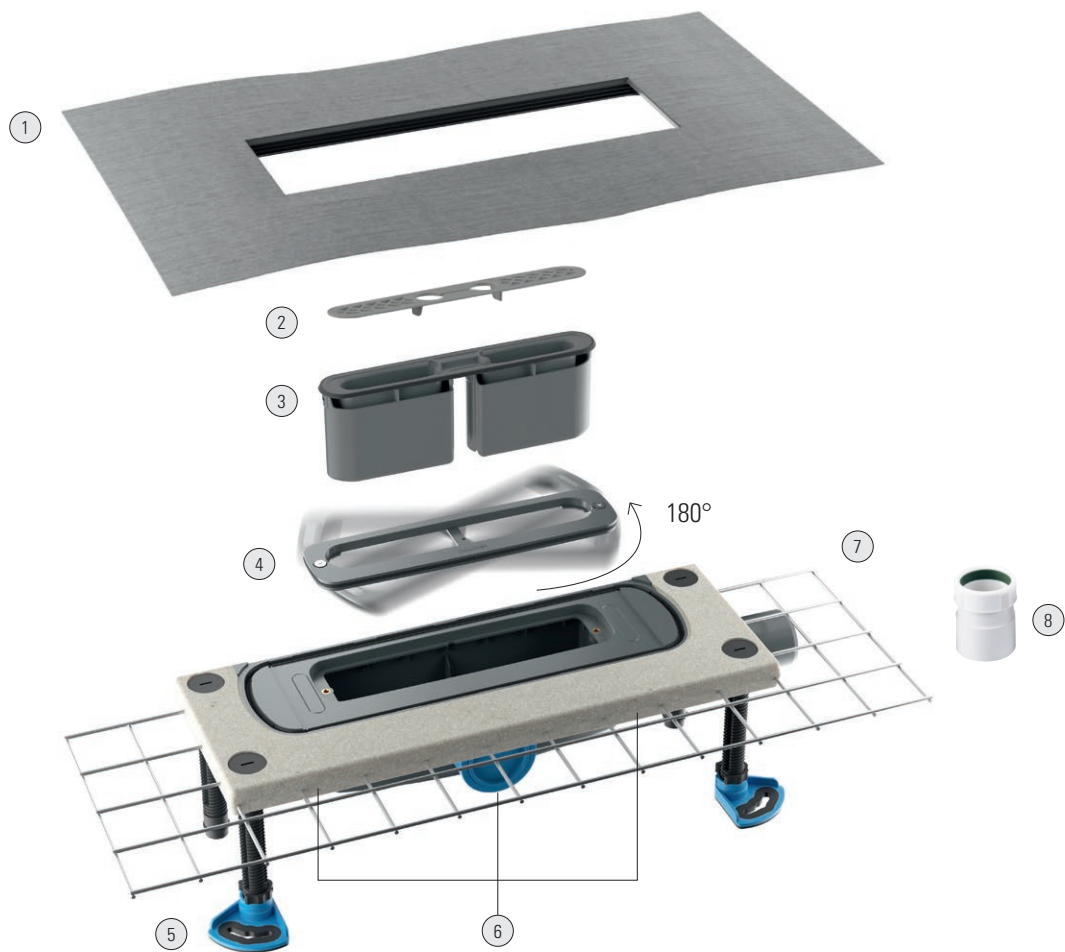

Variants



Build-in height	90 mm	65 mm	45 mm
Flow rates	0.5–1.0 l/s*		
Komfort	Certified sound insulation conforming to DIN 4109 and VDI 4100		

*Depending on the drain version and connection type.



Advantages

- ① Flexible, crease-free, click-in sealing sleeve for secure connection to bonded waterproofing conforming to DIN 18534
 - ② Hair sieve optional
 - ③ Easy-to-remove trap insert for quick cleaning; easy access to wastewater pipe
 - ④ Asymmetrical interchangeable frame for adaptation to various wall covering thicknesses of 12 – 32 mm even after installation in the screed
 - ⑤ Acoustically decoupled, height-adjustable mounting feet
 - ⑥ Tool-free positioning of drain outlet on three sides, ball-joint for stress-free connection to the wastewater pipe
 - ⑦ Polymer concrete collar with moulded steel mesh reinforcement
 - ⑧ DN 40 or DN 50 compression joint with solvent weld socket British Standard
 - ⑨ Available for delivery in Plan version
 - ⑩ Available with vertical outlet
- Installation in the screed, can be freely positioned against the wall or in the floor depending on preference
 - Maximum installation reliability thanks to polymer concrete collar with cast steel mesh reinforcement
 - For installation with all shower channels
 - Dallmer fire and sound-insulating collar 11, suitable for CeraFlex and DallFlex 2.0 vertical drain bodies

Installation video:
dallmer.com/installation



03

Shower channels

Page 21

CeraWall Select


Order overview page 64
Product range page 83

The accentuated
premium solid stainless
steel shower channel
for the wall

CeraWall Select
Brass matt, PVD-coated






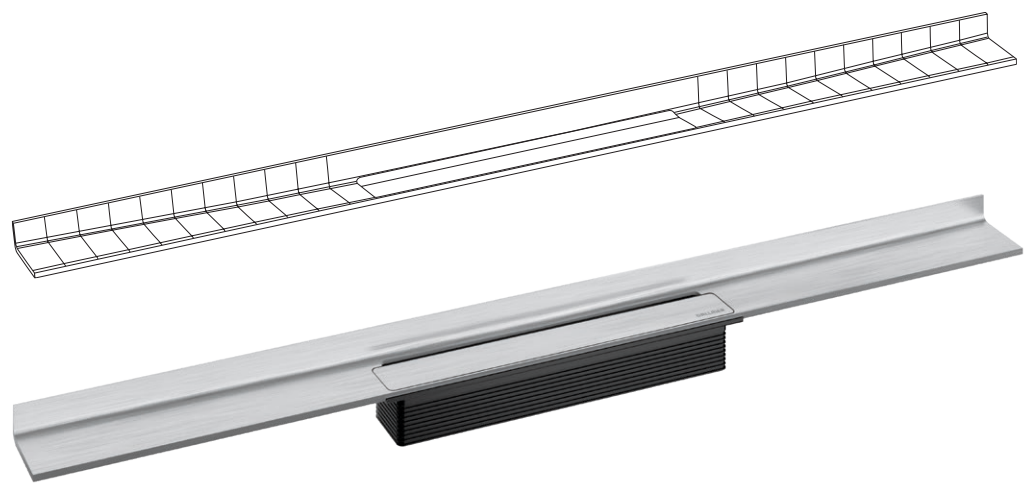

Materials and finishes



Stainless steel
matt




Stainless steel
polished



Black*
matt




Red gold*
matt



Brass*
matt

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Lengths	800 – 1500 mm, 1300 – 2000 mm in the Duo version
Suitable floor coverings	ceramic and natural stone coverings 8–36 mm with DallFlex 2.0, 10–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)
Suitable wall coverings	ceramic and natural stone coverings 8–28 mm with DallFlex 2.0, 12–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)

*PVD-coated

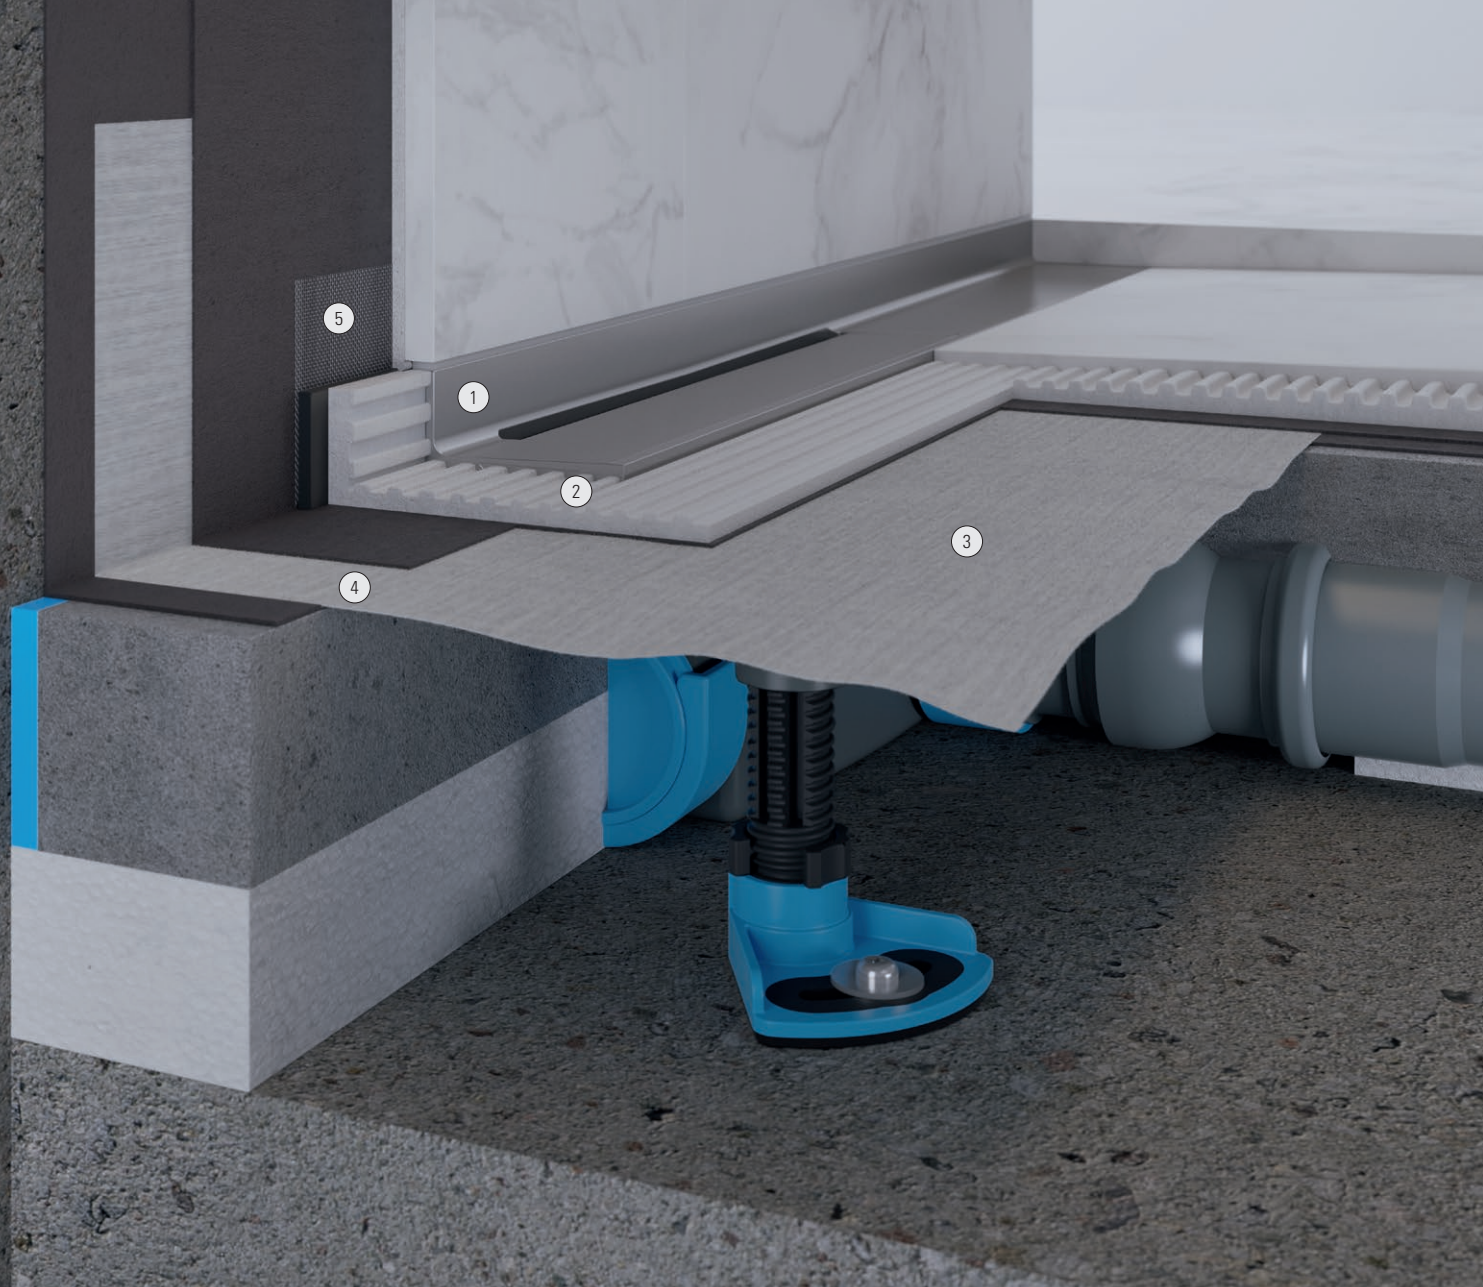

Advantages

- ① Solid 5 mm stainless steel rail
- ② Void-free laying in the adhesive bed
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing
- ⑤ Self-adhesive safety tape S 3 with cut-resistant stainless steel mesh and sound insulation

CeraWall Select visually accentuates the integrated drainage in level-access showers. Nothing is hidden away; even the functionality is emphasised through the use of high-quality materials.

- Drain channel with multi-sided precision slope
- Length can be adjusted with millimetre accuracy
- Flush-mount installation in the shower area
- The shower area is defined by a sharp edge which also creates a visual link to the wall
- Also available as an extra-long Duo version with two drain bodies



Installation video:
dallmer.com/installation



CeraWall Individual


Order overview page 64
Product range page 87

The shower channel for the wall
with individual design options
which is almost invisible





CeraWall Individual
Stainless steel matt

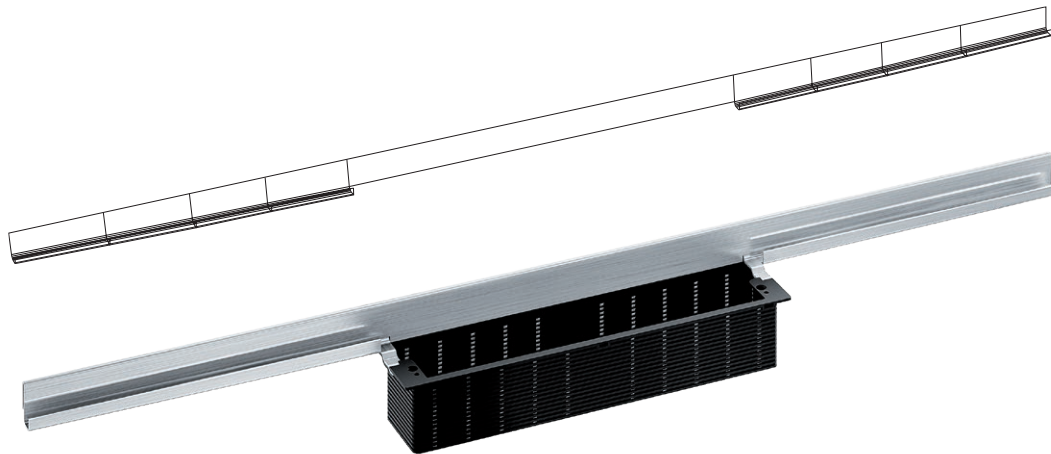

Cover plates



Individual:
Can be tiled

Natural stone:
Can be tiled

Design:
Cannot be tiled

Materials and finishes




Stainless steel
matt



Black*
matt



Red gold*
matt



Brass*
matt

Suitable for drain bodies

DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical

Build-in height

with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm

Lengths

800 – 1500 mm; 1300 – 2000 mm in the Duo version

Suitable floor coverings

ceramic and natural stone coverings 12 – 28 mm (incl. adhesive bed and bonded waterproofing)

Suitable wall coverings

ceramic and natural stone coverings 12 – 28 mm (incl. adhesive bed and bonded waterproofing)

*PVD-coated



- ① Stainless steel profile
- ② Void-free laying in the adhesive bed
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing
- ⑤ Self-adhesive safety tape S 3 with cut-resistant stainless steel mesh and sound insulation

Individual cover plate:
For flooring with unfinished cut edges (e.g. glazed tiles)

Natural stone cover plate:
For flooring with polished cut edges or through-dyed flooring
(e.g. natural stone or porcelain stoneware)

Cover plate design:
All-purpose design in stainless steel, not to be tiled

Advantages

Integrated within the wall-floor joint, this shower channel is almost invisible.

- Drain channel with multi-sided precision slope
- Length can be adjusted with millimetre accuracy
- Flush-mount installation in the shower area
- The shower area is defined by a sharp edge which also creates a visual link to the wall.
- Also available as an extra-long Duo version with two drain bodies

Installation video:
dallmer.com/installation



CeraWall Pure


Order overview page 64
Product range page 91

The budget-friendly
designer shower channel
for the wall



CeraWall Pure
Stainless steel



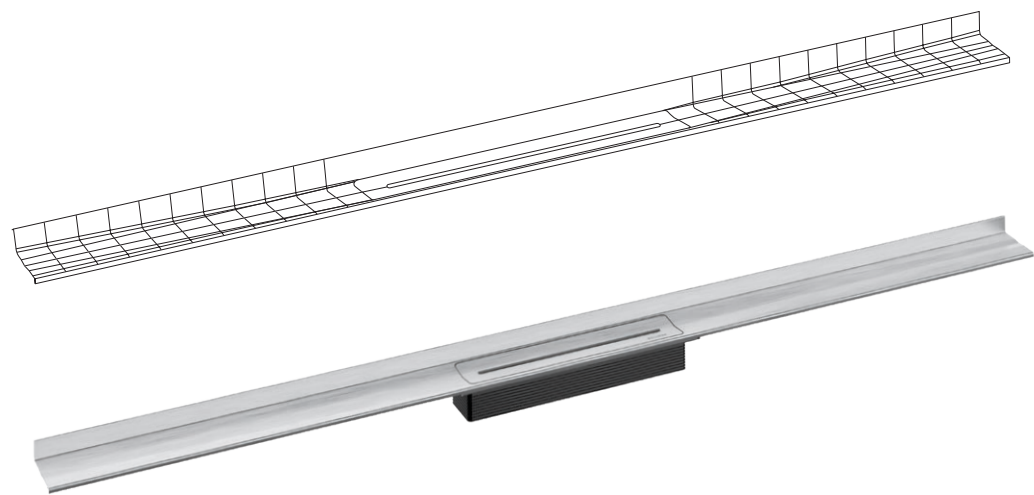

Materials and finishes



Stainless steel

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Lengths	900 mm, 1000 mm, 1200 mm
Suitable floor coverings	ceramic and natural stone coverings 8–36 mm with DallFlex 2.0, 10–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)
Suitable wall coverings	ceramic and natural stone coverings 8–28 mm with DallFlex 2.0, 12–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)



- ① 1.25 mm chamfered stainless steel
- ② Void-free laying in the adhesive bed
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

Advantages

CeraWall Pure in stainless steel design adds a new and modern touch to any bathroom. This budget-friendly shower channel for wall installation lacks none of the key features that set the products of the DallFlex system family apart. It is extremely easy to clean and the tool-free, click-in DallFlex 2.0 sealing sleeve ensures reliable waterproofing.

- Drain channel with integrated cross slope
- Length can be adjusted with millimetre accuracy
- The shower area is defined by a sharp edge, which also creates a visual link to the wall

Installation video:
dallmer.com/installation



CeraFloor Select

Order overview page 66
Product range page 92

The exclusive premium solid stainless steel shower channel for in-floor and front-of-wall installation





CeraFloor Select
Black matt, PVD-coated



Materials and finishes



Stainless steel
matt




Stainless steel
polished



Black*
matt



Red gold*
matt



Brass*
matt

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Lengths	800 – 1500 mm, in the Duo version 1300 – 2000 mm
Suitable floor coverings	ceramic and natural stone coverings 8–36 mm with DallFlex 2.0, 10–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)
Suitable wall coverings	ceramic and natural stone coverings 8–25 mm with DallFlex 2.0, 10–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)

*PVD-coated



Advantages

- ① Solid 6 mm stainless steel rail
- ② Void-free laying in the adhesive bed
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

These days, open and generously sized level-access showers are considered the epitome of luxury and good taste, which is why we designed the CeraFloor Select shower channel, a system that develops its full effect over a larger surface area.

- Drain channel with multi-sided precision slope
- Length can be adjusted with millimetre accuracy
- Flush-mount installation in the shower area
- Also available as an extra-long Duo version with two drain bodies




Installation video:
dallmer.com/installation







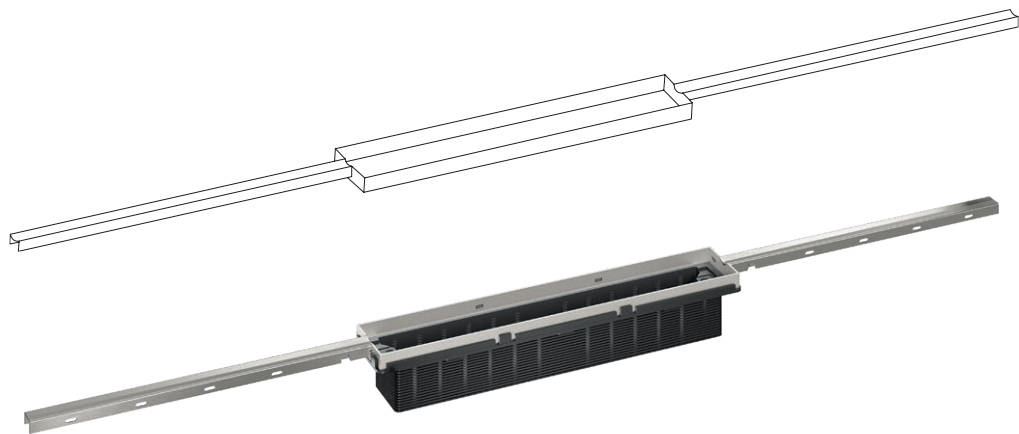

Cover plates



Individual:
Can be tiled



Design:
Cannot be tiled

Materials and finishes




Stainless steel
matt



Black*
matt



Red gold*
matt



Brass*
matt

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Lengths	800 – 1500 mm
Suitable floor coverings	ceramic and natural stone coverings 12–28 mm (incl. adhesive bed and bonded waterproofing)

*PVD-coated



- ① Stainless steel profile
- ② Void-free laying in the adhesive bed
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

Individual cover plate:
For tiling with individual floor coverings

Cover plate design:
All-purpose design in stainless steel, not to be tiled

Advantages

CeraFloor Individual impresses across the board, both aesthetically and technically. The cover plate on the minimalistically elegant shower channel can be fitted with almost any tile. This makes it perfect for individual bathroom and spa concepts.

- Drain profile with integrated cross slope
- Length can be adjusted with millimetre accuracy
- Flush-mount installation in the shower area
- The greatest possible freedom of design, can be covered with almost any tile



Installation video:
dallmer.com/installation



CeraFloor Pure


Order overview page 66
Product range page 100

The budget-friendly
designer shower channel
for in-floor and also
front-of-wall installation





CeraFloor Pure
Stainless steel

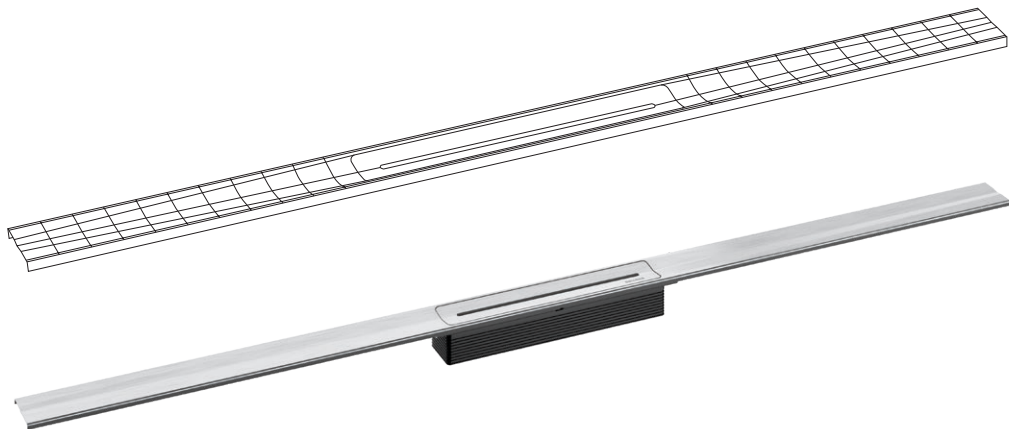

Materials and finishes



Stainless steel

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Lengths	900 mm, 1000 mm, 1200 mm
Suitable floor coverings	ceramic and natural stone coverings 8–36 mm with DallFlex 2.0, 10–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)
Suitable wall coverings	ceramic and natural stone coverings 8–25 mm with DallFlex 2.0, 10–28 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)



- ① 1.25 mm chamfered stainless steel
- ② Void-free laying in the adhesive bed
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

Advantages

CeraFloor Pure has all the quality features of a true Dallmer shower channel and is particularly ideal for those working on a budget. The shower channel in a contemporary stainless steel design can be installed in such a way that it is flush with recesses; functional and easy to clean. This makes it ideal for fitting out large properties.

- Drain channel with integrated cross slope
- Length can be adjusted with millimetre accuracy
- Flush-mount installation in the shower area

Installation video:
dallmer.com/installation



The elegant and compact shower channel
for in-floor installation






Zentrix
Matt red gold, PVD-coated



Materials and finishes



Stainless steel
matt




Stainless steel
polished



Black*
matt



Red gold*
matt



Brass*
matt

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Dimension	300 × 50 mm
Suitable floor coverings	ceramic and natural stone coverings 8–34 mm with DallFlex 2.0, 11–38 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)

*PVD-coated



- ① Stainless steel cover plate
- ② Tile adhesive
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

Advantages

With its sculptural design, Zentrix perfectly combines form and functionality. The solid stainless steel cover plate opens up inwards with a soft curve to form a gap through which the water drains away.

- Free positioning in the shower



Installation video:
dallmer.com/installation




The exclusive and compact
shower channel for in-floor installation






CeraNiveau
Black matt, PVD-coated

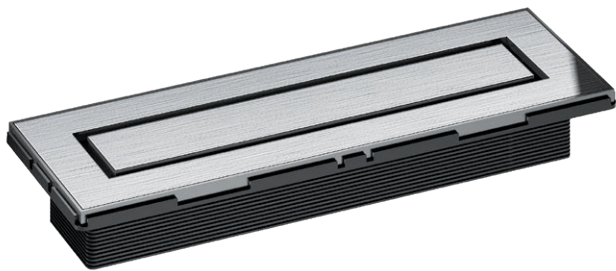

Materials and finishes



Stainless steel
matt




Stainless steel
polished



Black*
matt



Red gold*
matt



Brass*
matt

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Dimension	300 × 100 mm
Suitable floor coverings	ceramic and natural stone coverings 9–30 mm with DallFlex 2.0, 9–34 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)
*PVD-coated	



Advantages

- ① Stainless steel cover plate
- ② Tile adhesive
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

Visual elegance combined with inventive technology; that is CeraNiveau. This highly compact drainage system offers a pioneering yet individual concept for water drainage.

- Free positioning in the shower



reddot design award
winner 2007



DESIGNPREIS
2008

Installation video:
dallmer.com/installation



CeraFrame Individual

Order overview page 68
Product range page 103

The customisable compact
shower channel for in-floor installation

CeraFrame Individual
with stainless steel frame that can be tiled







Cover plates



Individual:
Can be tiled



Design:
Cannot be tiled

Materials and finishes




Stainless steel
matt



Black*
matt




Red gold*
matt



Brass*
matt

Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical / CeraFlex / CeraFlex Plan / CeraFlex vertical
Build-in height	with 45 mm drain body (vertical), 65 mm, 90 mm or 115 mm
Dimension	300 × 50 mm
Suitable floor coverings	ceramic and natural stone coverings 9–38 mm with DallFlex 2.0, 12–38 mm with CeraFlex (incl. adhesive bed and bonded waterproofing)

*PVD-coated

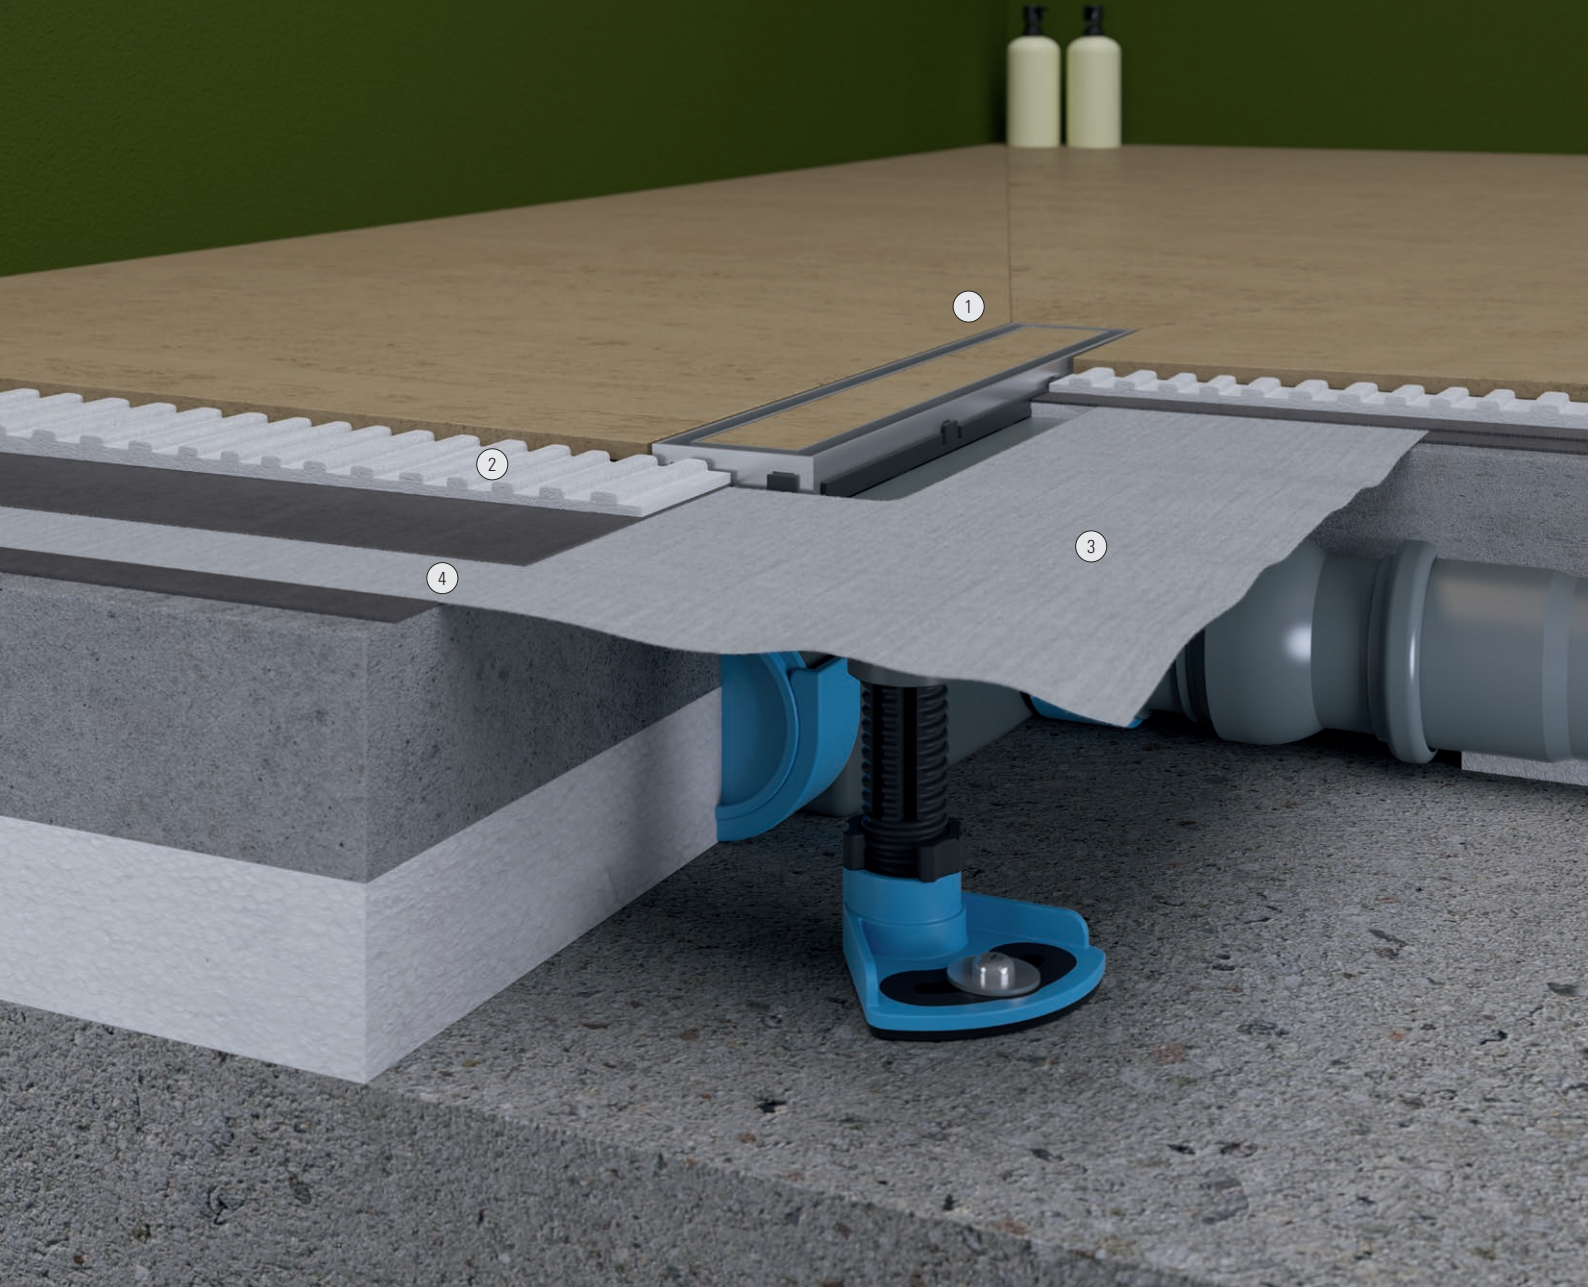

- ① Stainless steel frames that can be tiled
- ② Tile adhesive
- ③ DallFlex 2.0 sealing sleeve
- ④ Bonded waterproofing

Individual cover plate:
For tiling with individual floor coverings

Cover plate design:
All-purpose design in stainless steel, not to be tiled

Advantages

All you see of the CeraFrame Individual is a slim rectangle:
The compact shower channel provides sophisticated technology in the most compact of forms – and offers numerous options for individualisation.

- Free positioning in the shower



Installation video:
dallmer.com/installation



CeraFrame Liquid Neo


Order overview page 68
Product range page 105

A minimalist interior scene featuring a wooden cabinet and a mirror against a grey wall. The cabinet is made of light-colored wood with a thin black frame. The mirror is rectangular with a thin black frame. The wall is a solid, light grey color. The floor is a dark grey color. The overall aesthetic is clean and modern.


The new form of seamless aesthetics
makes functionality invisible.



CeraFrame Liquid Neo

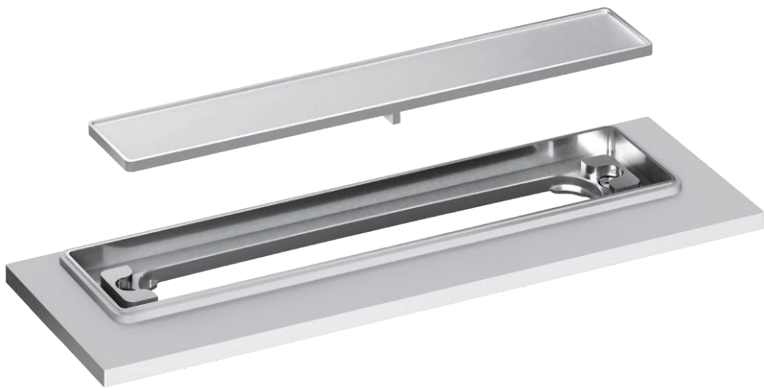

Material	Stainless steel
Suitable for drain bodies	DallFlex 2.0 115 / DallFlex 2.0 / DallFlex 2.0 Plan / DallFlex 2.0 vertical
Build height	4.5 mm including waterproofing
Dimension	270 × 47 mm
Suitable floor coverings	Spatula-applied seamless thin-layer floor coverings from selected manufacturers Proven combinations: dallmer.com/liquid

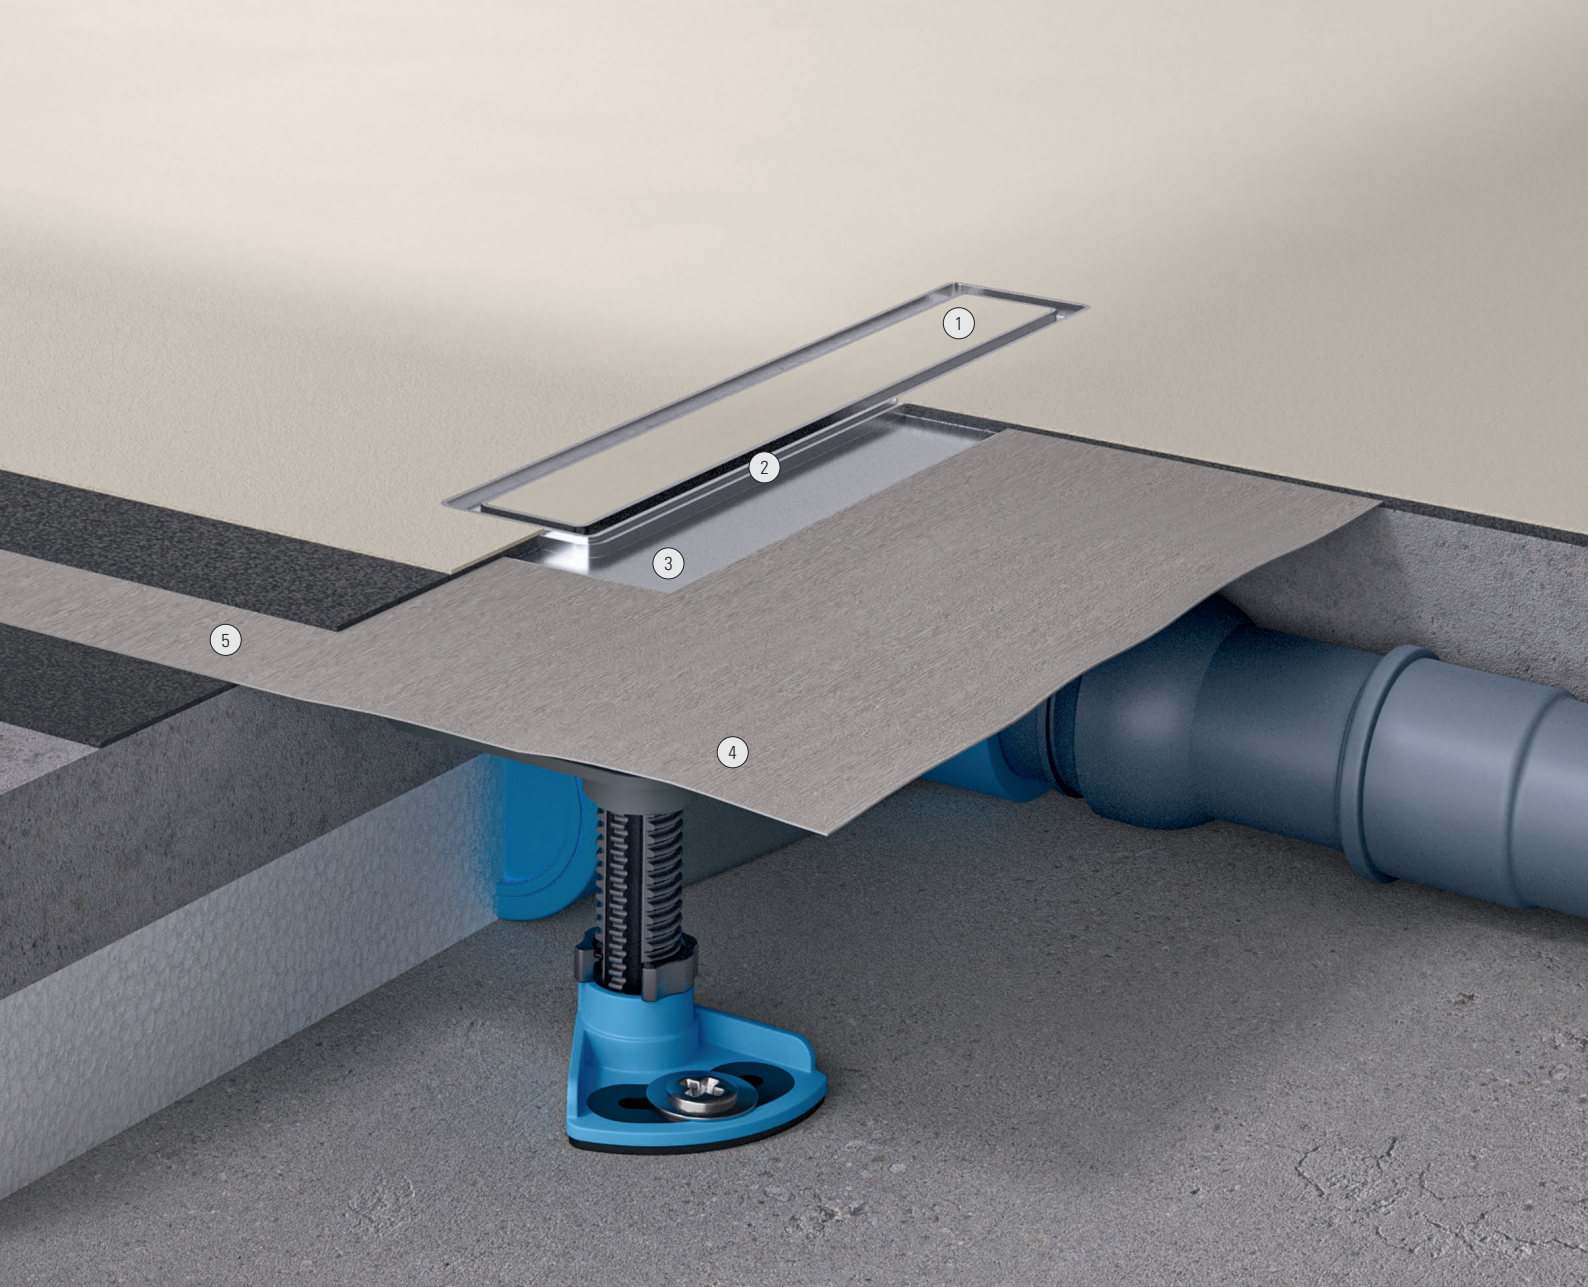

- ① CeraFrame Liquid Neo coatable cover plate
- ② Two-stage levelling aid
- ③ CeraFrame Liquid Neo shower channel
- ④ DallFlex 2.0 sealing sleeve
- ⑤ Bonded waterproofing

Advantages

CeraFrame Liquid Neo is a new type of drainage system. The solid construction type, the fully closed channel contour and the watertight connection to the drain body DallFlex 2.0 guarantee maximum safety for thin-layer floor coverings, and prevent the moisture from penetrating underneath the covering.

- Specifically developed for thin-layered, seamless filler systems
- Integrates ideally into the shower area as the cover plate is also filled with the thin-layer floor covering
- No more high layer thicknesses with long drying times thanks to the lower build-in height
- Solid construction
- Two-level troweling aid
- 100 % watertight connection to the drain body DallFlex 2.0, as per DIN 18534



Installation video:
dallmer.com/installation



04

Order overview

Page 63

The DallFlex system family

CeraWall Select



LENGTH	800 mm	900 mm	1000 mm	1100 mm	1200 mm	1300 mm
STAINLESS STEEL MATT	535245	535146	535153	535160	535177	536457
STAINLESS STEEL POLISHED	535252	535108	535115	535122	535139	536419
BLACK MATT	535283	535306	535313	535320	535337	—
RED GOLD MATT	535344	535351	535368	535375	535382	—
BRASS MATT	535399	535405	535412	535429	535436	—

CeraWall Individual



LENGTH	800 mm	900 mm	1000 mm	1100 mm	1200 mm	1300 mm
STAINLESS STEEL MATT	535269	535207	535214	535221	535238	536518
BLACK MATT	535603	535627	535634	535641	535658	—
RED GOLD MATT	536891	536907	536914	536921	536938	—
BRASS MATT	536945	536952	536969	536976	535665	—

Cover plates CeraWall Individual

Individual



Design



Natural Stone



SPECIFICATION	Individual	Design	Natural Stone
STAINLESS STEEL MATT	535023	535047	535030
BLACK MATT	537003	537010	—
RED GOLD MATT	537027	537034	—
BRASS MATT	537041	537058	—

CeraWall Pure



LENGTH	900 mm	1000 mm	1200 mm
STAINLESS STEEL	538475	538482	538499

CeraWall Select Duo



LENGTH	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm	1800 mm
STAINLESS STEEL MATT	536181	536198	536204	536211	536228	536235
STAINLESS STEEL POLISHED	536105	536112	536129	536136	536143	536150

CeraWall Individual Duo



LENGTH	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm	1800 mm
STAINLESS STEEL MATT	536020	536037	536044	536051	536068	536075

SPECIFICATION	Individual	Design	Naturstein
STAINLESS STEEL MATT	535191	535092	535184

Cover plates
CeraWall
Individual Duo

	1400 mm	1500 mm
	536464	536471
	536426	536433
	—	—
	—	—
	—	—

	1400 mm	1500 mm
	536525	536532
	—	—
	—	—
	—	—

	1900 mm	2000 mm
	536242	536259
	536167	536174

	1900 mm	2000 mm
	536082	536099

Individual Design Natural Stone

Drain body DallFlex 2.0



NOMINAL DIAMETER	DN 40	DN 50		DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	115 mm	45 mm (without mounting feet 30 mm)
PART NO.	570017	570000	570031	570024
FLOW RATE (with 10/20 mm water over cover plate)	0,47/0,51 l/s	0,61/0,83 l/s	0,8/1,1 l/s	0,93/1,0 l/s



or

Drain body CeraFlex



NOMINAL DIAMETER	DN 40	DN 50	DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	45 mm (without mounting feet 30 mm)
PART NO.	537157	537140	537164
FLOW RATE (with 10/20 mm water over cover plate)	0,48/0,5 l/s	0,61/0,83 l/s	0,8/1,0 l/s

Drain body DallFlex 2.0 Duo



NOMINAL DIAMETER	DN 40	DN 50	DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	45/30 mm (without mounting feet)
PART NO.	570055	570062	570109
FLOW RATE (with 10/20 mm water over cover plate)	0,8/0,86 l/s	0,9/1,45 l/s	1,2/2,35 l/s

The DallFlex system family

CeraFloor Select 	<table><tr><th>LENGTH</th><th>800 mm</th><th>900 mm</th><th>1000 mm</th><th>1100 mm</th><th>1200 mm</th><th>1300 mm</th><th></th></tr><tr><td>STAINLESS STEEL MATT</td><td>538000</td><td>538024</td><td>538048</td><td>538055</td><td>538062</td><td>538079</td><td></td></tr><tr><td>STAINLESS STEEL POLISHED</td><td>538109</td><td>538123</td><td>538147</td><td>538154</td><td>538161</td><td>538178</td><td></td></tr><tr><td>BLACK MATT</td><td>538239</td><td>538253</td><td>538277</td><td>538284</td><td>538291</td><td>—</td><td></td></tr><tr><td>RED GOLD MATT</td><td>538307</td><td>538321</td><td>538345</td><td>538352</td><td>538369</td><td>—</td><td></td></tr><tr><td>BRASS MATT</td><td>538376</td><td>538390</td><td>538413</td><td>538420</td><td>538437</td><td>—</td><td></td></tr></table>	LENGTH	800 mm	900 mm	1000 mm	1100 mm	1200 mm	1300 mm		STAINLESS STEEL MATT	538000	538024	538048	538055	538062	538079		STAINLESS STEEL POLISHED	538109	538123	538147	538154	538161	538178		BLACK MATT	538239	538253	538277	538284	538291	—		RED GOLD MATT	538307	538321	538345	538352	538369	—		BRASS MATT	538376	538390	538413	538420	538437	—	
LENGTH	800 mm	900 mm	1000 mm	1100 mm	1200 mm	1300 mm																																											
STAINLESS STEEL MATT	538000	538024	538048	538055	538062	538079																																											
STAINLESS STEEL POLISHED	538109	538123	538147	538154	538161	538178																																											
BLACK MATT	538239	538253	538277	538284	538291	—																																											
RED GOLD MATT	538307	538321	538345	538352	538369	—																																											
BRASS MATT	538376	538390	538413	538420	538437	—																																											
CeraFloor Individual 	<table><tr><th>LENGTH</th><th>800–1500 mm</th></tr><tr><td>STAINLESS STEEL MATT</td><td>537478</td></tr><tr><td>BLACK MATT</td><td>537546</td></tr><tr><td>RED GOLD MATT</td><td>537645</td></tr><tr><td>BRASS MATT</td><td>537744</td></tr></table> <table><tr><th>SPECIFICATION</th><th>Individual</th><th>Design</th></tr><tr><td>STAINLESS STEEL MATT</td><td>537379</td><td>537386</td></tr><tr><td>BLACK MATT</td><td>537553</td><td>537560</td></tr><tr><td>RED GOLD MATT</td><td>537652</td><td>537669</td></tr><tr><td>BRASS MATT</td><td>537751</td><td>537768</td></tr></table>	LENGTH	800–1500 mm	STAINLESS STEEL MATT	537478	BLACK MATT	537546	RED GOLD MATT	537645	BRASS MATT	537744	SPECIFICATION	Individual	Design	STAINLESS STEEL MATT	537379	537386	BLACK MATT	537553	537560	RED GOLD MATT	537652	537669	BRASS MATT	537751	537768																							
LENGTH	800–1500 mm																																																
STAINLESS STEEL MATT	537478																																																
BLACK MATT	537546																																																
RED GOLD MATT	537645																																																
BRASS MATT	537744																																																
SPECIFICATION	Individual	Design																																															
STAINLESS STEEL MATT	537379	537386																																															
BLACK MATT	537553	537560																																															
RED GOLD MATT	537652	537669																																															
BRASS MATT	537751	537768																																															
Cover plates CeraFloor Individual Individual  Design 																																																	
CeraFloor Pure 	<table><tr><th>LENGTH</th><th>900 mm</th><th>1000 mm</th><th>1200 mm</th></tr><tr><td>STAINLESS STEEL</td><td>538208</td><td>538215</td><td>538222</td></tr></table>	LENGTH	900 mm	1000 mm	1200 mm	STAINLESS STEEL	538208	538215	538222																																								
LENGTH	900 mm	1000 mm	1200 mm																																														
STAINLESS STEEL	538208	538215	538222																																														
CeraFloor Select Duo 	<table><tr><th>LENGTH</th><th>1300 mm</th><th>1400 mm</th><th>1500 mm</th><th>1600 mm</th><th>1700 mm</th><th>1800 mm</th><th></th></tr><tr><td>STAINLESS STEEL MATT</td><td>537539</td><td>537577</td><td>537584</td><td>537591</td><td>537607</td><td>537614</td><td></td></tr><tr><td>STAINLESS STEEL POLISHED</td><td>537447</td><td>537454</td><td>537461</td><td>537485</td><td>537492</td><td>537508</td><td></td></tr><tr><td>BLACK MATT</td><td>537676</td><td>537683</td><td>537690</td><td>537706</td><td>537713</td><td>537720</td><td></td></tr></table>	LENGTH	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm	1800 mm		STAINLESS STEEL MATT	537539	537577	537584	537591	537607	537614		STAINLESS STEEL POLISHED	537447	537454	537461	537485	537492	537508		BLACK MATT	537676	537683	537690	537706	537713	537720																	
LENGTH	1300 mm	1400 mm	1500 mm	1600 mm	1700 mm	1800 mm																																											
STAINLESS STEEL MATT	537539	537577	537584	537591	537607	537614																																											
STAINLESS STEEL POLISHED	537447	537454	537461	537485	537492	537508																																											
BLACK MATT	537676	537683	537690	537706	537713	537720																																											

	1400 mm	1500 mm
	538086	538093
	538185	538192
	—	—
	—	—
	—	—

Drain body DallFlex 2.0



NOMINAL DIAMETER	DN 40	DN 50		DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	115 mm	45 mm (without mounting feet 30 mm)
PART NO.	570017	570000	570031	570024
FLOW RATE (with 10/20 mm water over cover plate)	0,47/0,51 l/s	0,61/0,83 l/s	0,8/1,1 l/s	0,93/1,0 l/s

+

or


Drain body CeraFlex



NOMINAL DIAMETER	DN 40	DN 50	DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	45 mm (without mounting feet 30 mm)
PART NO.	537157	537140	537164
FLOW RATE (with 10/20 mm water over cover plate)	0,48/0,5 l/s	0,61/0,83 l/s	0,8/1,0 l/s

	1900 mm	2000 mm
	537621	537638
	537515	537522
	537737	537775

Drain body DallFlex 2.0 Duo

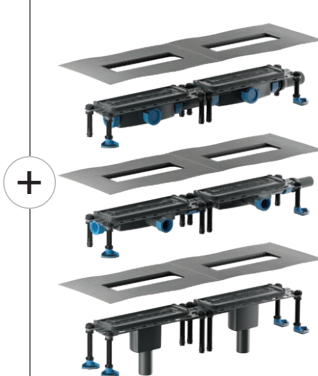

NOMINAL DIAMETER	DN 40	DN 50	DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	45/30 mm (without mounting feet)
PART NO.	570055	570062	570109
FLOW RATE (with 10/20 mm water over cover plate)	0,8/0,86 l/s	0,9/1,45 l/s	1,2/2,35 l/s

The DallFlex system family

Zentrix



LENGTH	300×50 mm
STAINLESS STEEL MATT	511317
STAINLESS STEEL POLISHED	511324
BLACK MATT	511331
RED GOLD MATT	511348
BRASS MATT	511355

CeraNiveau



LENGTH	300×100 mm
STAINLESS STEEL MATT	511362
STAINLESS STEEL POLISHED	511379
BLACK MATT	511386
RED GOLD MATT	511058
BRASS MATT	511065

CeraFrame Individual



LENGTH	300×50 mm
STAINLESS STEEL MATT	537331
BLACK MATT	537348
RED GOLD MATT	537355
BRASS MATT	537362

Cover plates CeraFrame Individual

Individual



Design



SPECIFICATION	
STAINLESS STEEL MATT	
BLACK MATT	
RED GOLD MATT	
BRASS MATT	

CeraFrame Liquid Neo Shower channel for thin-layer filler systems



LENGTH	270×47 mm
FOR ALL DRAIN BODIES DALLFLEX 2.0	570499

	Individual	Design
	537379	537386
	537553	537560
	537652	537669
	537751	537768

Drain body DallFlex 2.0



NOMINAL DIAMETER	DN 40	DN 50		DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	115 mm	45 mm (without mounting feet 30 mm)
PART NO.	570017	570000	570031	570024
FLOW RATE (with 10/20 mm water over cover plate)	0,47/0,51 l/s	0,61/0,83 l/s	0,8/1,1 l/s	0,93/1,0 l/s



or

Drain body CeraFlex



NOMINAL DIAMETER	DN 40	DN 50	DN 50 vertical
BUILT-IN HEIGHT	65 mm	90 mm	45 mm (without mounting feet 30 mm)
PART NO.	537157	537140	537164
FLOW RATE (with 10/20 mm water over cover plate)	0,48/0,5 l/s	0,61/0,83 l/s	0,8/1,0 l/s

05

Product range

Page 71

Drain body DallFlex 2.0

DALLMER drain body DallFlex 2.0 115

conforming to DIN EN 1253
for installation with shower channels CeraWall, CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Side outlet DN 50, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeve for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 115 – 238 mm
- fully removable, two-piece odor trap and rodding eye, 50 mm water seal (conforming to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlet polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)

	Required	Dallmer
DN 50	0,8 l/s	0,8/1,1 l/s


ITEM	DN	PART NO.
drain body DallFlex 2.0 115	DN 50	570031

Can be connected to British standard pipework with adaptor part No. 880727.

build-in height 115 mm




drain body DallFlex 2.0 115

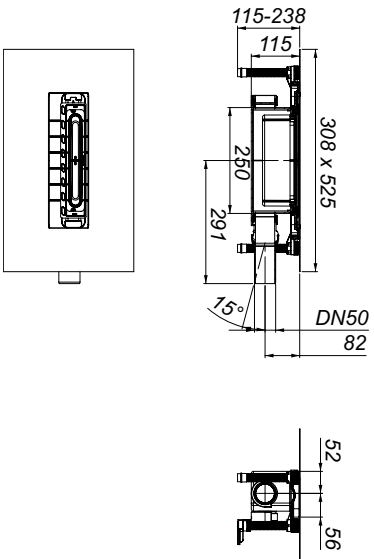


DALLMER sound-insulating element DallFlex 115

for use with drain body DallFlex 115 and shower channels CeraFloor, CeraWall, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Tested to conform to DIN 4109/VDI 4100, certificate P-BA 146/2015 (CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo) or P-BA 148/2015 (CeraWall).

ITEM	PART NO.
sound-insulating element DallFlex 115	538819

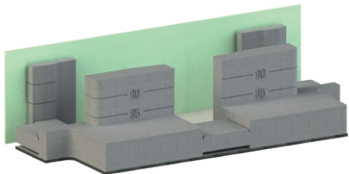

sound-insulating element DallFlex 115

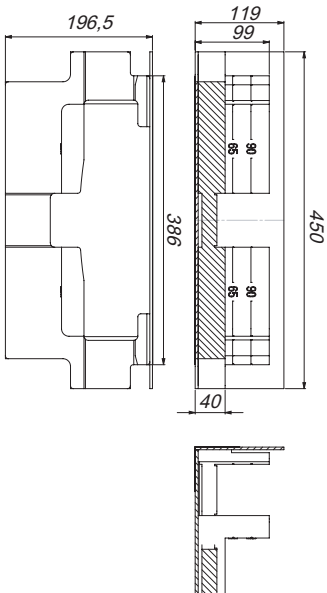

Drain body DallFlex 2.0

DALLMER drain body DallFlex 2.0

conforming to DIN EN 1253
for installation with shower channels CeraWall, CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Side outlet DN 50, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeve for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 90 – 238 mm
- fully removable, two-piece odor trap and rodding eye, 50 mm water seal (conforming to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlet polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)

	Required	Dallmer
DN 50	0,8 l/s	0,61/0,83 l/s

ITEM	DN	PART NO.
drain body DallFlex 2.0	DN 50	570000

Can be connected to British standard pipework with adaptor part No. 880727.

DALLMER sound-insulating element DallFlex/CeraFlex



for use with drain body DallFlex/CeraFlex and shower channels CeraFloor, CeraWall, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Tested to conform to DIN 4109/VDI 4100, certificate P-BA 146/2015 (CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo) or P-BA 148/2015 (CeraWall).

ITEM	PART NO.
sound-insulating element DallFlex/CeraFlex	539090


build-in height 90 mm



drain body DallFlex 2.0

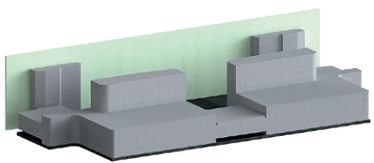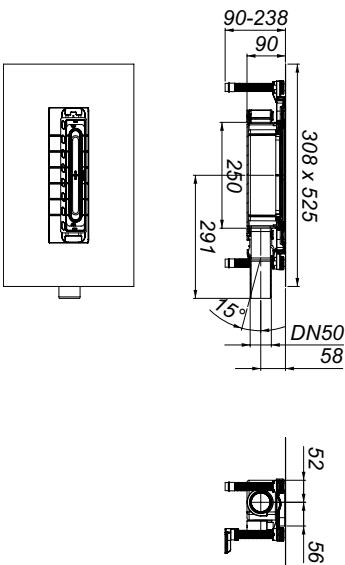

sound-insulating element DallFlex/CeraFlex

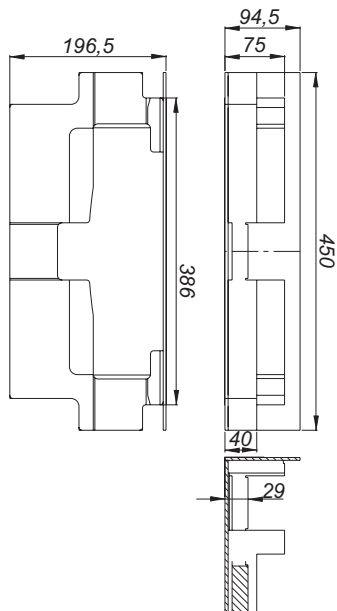

Drain body DallFlex 2.0 Duo

DALLMER drain body DallFlex 2.0 Duo

conforming to DIN EN 1253
for installation with shower channels CeraWall Select Duo, CeraWall Individual Duo and CeraFloor Select Duo. Two side outlets DN 50, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeves for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 65 – 238 mm
- fully removable, two-piece odor traps and rodding eyes, 50 mm water seal (conforming to DIN EN 1253)
- hair sieves (can be used optionally)
- temporary blanking plates

MATERIAL

drain bodies and outlets polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)		
	Required	Dallmer
DN 50	0,8 l/s	0,9/1,45 l/s

ITEM	DN	PART NO.
drain body DallFlex 2.0 Duo	DN 50	570062

Can be connected to British standard pipework with adaptor part No. 880727.

DALLMER sound-insulating element DallFlex Duo



for use with drain body DallFlex Duo and shower channels CeraWall Select Duo, CeraWall Individual Duo and CeraFloor Select Duo.
Tested to conform to DIN 4109/VDI 4100, certificate P-BA 148/2015.

ITEM	PART NO.
sound-insulating element DallFlex Duo	539113


build-in height 90 mm



drain body DallFlex 2.0 Duo

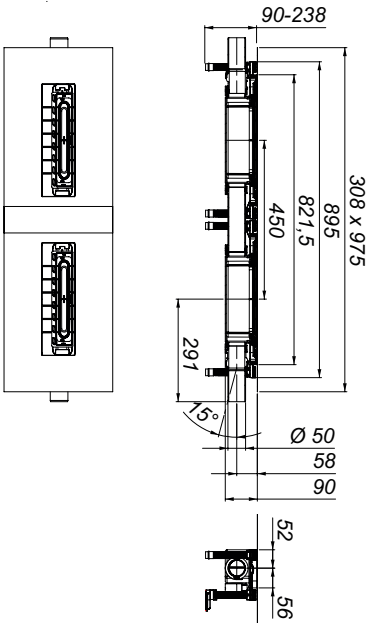

sound-insulating element DallFlex Duo

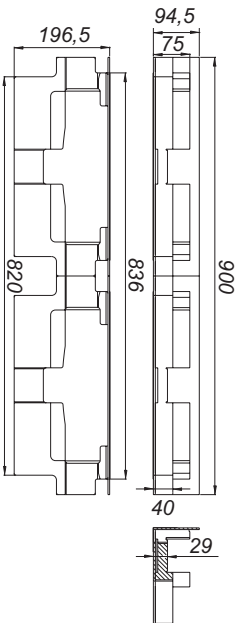

Drain body DallFlex 2.0

DALLMER drain body DallFlex 2.0 Plan

for installation with shower channels CeraWall, CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Side outlet DN 40, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeve for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 65 – 238 mm
- fully removable, two-piece odor trap and rodding eye, 30 mm water seal (deviating to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlet polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-6 TAB. 7 (with 10/20 mm water over cover plate)

	Required	Dallmer
DN 40	0,6 l/s	0,47/0,51 l/s

Floor drain in accordance with DIN EN 1253, minimum flow rate 0.4 l/s, suitable for one shower head!

ITEM	DN	PART NO.
drain body DallFlex 2.0 Plan	DN 40	570017

Can be connected to British standard pipework with adaptor part No. 880734.

DALLMER sound-insulating element DallFlex/CeraFlex Plan



for use with drain body DallFlex Plan/CeraFlex Plan and shower channels CeraFloor, CeraWall, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Tested to conform to DIN 4109/VDI 4100, certificate P-BA 142/2015 (CeraFloor, CeraWall Individual, CeraFrame, Zentrix, CeraNiveau and CeraFrame Liquid Neo) and P-BA 144/2015 (CeraWall Select).

ITEM	PART NO.
sound-insulating element DallFlex/CeraFlex Plan	539106


build-in height 65 mm



drain body DallFlex 2.0 Plan

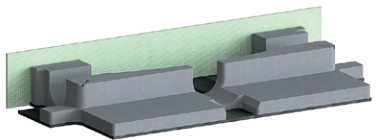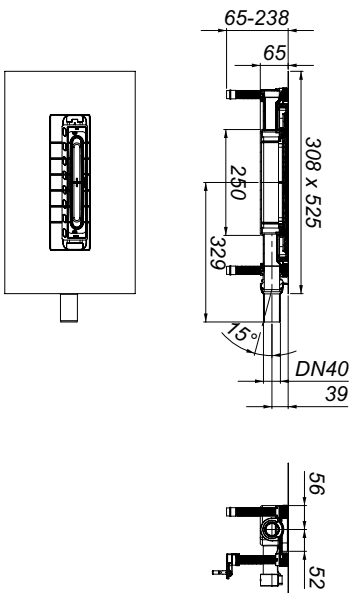

sound-insulating element DallFlex/CeraFlex Plan

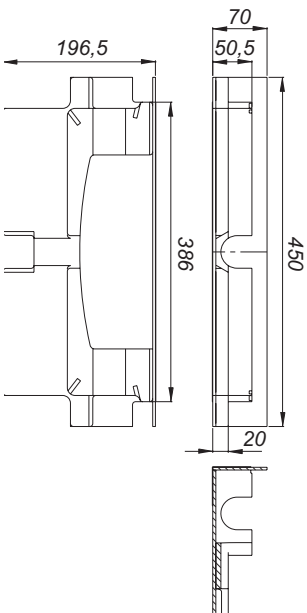

Drain body DallFlex 2.0 Duo

DALLMER drain body DallFlex 2.0 Duo Plan

for installation with shower channels CeraWall Select Duo, CeraWall Individual Duo and CeraFloor Select Duo. Two side outlets DN 40, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeves for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 65 – 238 mm
- fully removable, two-piece odor traps and rodding eyes, 30 mm water seal (deviating to DIN EN 1253)
- hair sieves (can be used optionally)
- temporary blanking plates

MATERIAL

drain bodies and outlets polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-6 TAB. 7 (with 10/20 mm water over cover plate)

	Required	Dallmer
DN 40	0,6 l/s	0,8/0,86 l/s


ITEM	DN	PART NO.
drain body DallFlex 2.0 Duo Plan	DN 40	570055

Can be connected to British standard pipework with adaptor part No. 880734.

build-in height 65 mm




drain body DallFlex 2.0 Duo Plan

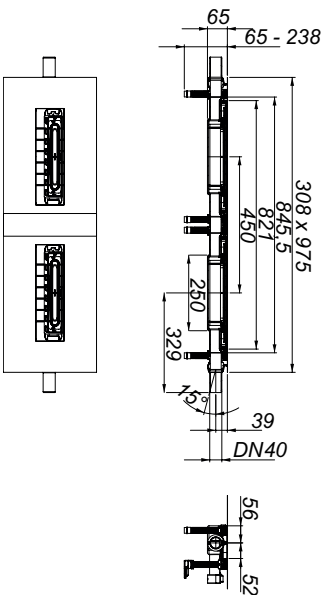


DALLMER sound-insulating element DallFlex Duo Plan

for use with drain body DallFlex Duo Plan and shower channels CeraWall Select Duo, CeraWall Individual Duo and CeraFloor Select Duo. Tested to conform to DIN 4109/VDI 4100, certificate P-BA 142/2015 (CeraWall Individual Duo) and P-BA 144/2015 (CeraWall Select Duo).

ITEM	PART NO.
sound-insulating element DallFlex Duo Plan	539120



sound-insulating element DallFlex Duo Plan

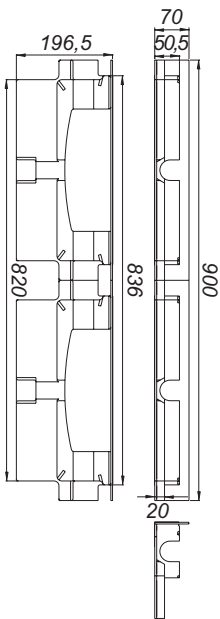

Drain body DallFlex 2.0

DALLMER drain body DallFlex 2.0 vertical

conforming to DIN EN 1253
for installation with shower channels CeraWall, CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Vertical outlet DN 50.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeve for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 45 – 238 mm
- fully removable, two-piece odor trap and rodding eye, 50 mm water seal (conforming to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlets polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)

	Required	Dallmer
DN 50	0,8 l/s	0,93/1,0 l/s

ITEM	DN	PART NO.
 drain body DallFlex 2.0 vertical	DN 50	570024

Can be connected to British standard pipework with adaptor part No. 880727.

DALLMER Fire protection element DN 50

suitable for DallFlex 2.0 vertical and DallDrain vertical drain bodies. Fire protection tested and approved in accordance with German building regulations with approval number (abZ) Z-19.17-1543 and type approval (aBG) Z-19.53-2624.
For installation in core drill holes (d: 120-124 mm) in F 30/60/90/120 rated floors.

SPECIFICATION

- clamping element
- intumescent material
- flue gas seal

connects to:



plastic pipework DN 50 with couplings,
cast iron pipework DN 50 with DALLMER HT/SML pipe coupling DN 50/DN 50 (part-no. 880024)

ITEM	PART NO.
Fire protection element DN 50	545008

build-in height 45 mm
(without mounting feet 30 mm)



drain body DallFlex 2.0 vertical


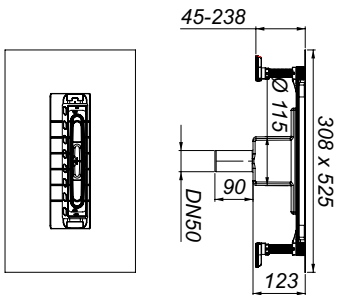


core drill: d: 120 mm

core drill for fire protection element DN 50:
d: 120 - 124 mm



Fire protection element DN 50



core drill: d: 120 - 124 mm

Drain body DallFlex 2.0 Duo

DALLMER drain body DallFlex 2.0 Duo vertical

conforming to DIN EN 1253
for installation with shower channels CeraWall Select Duo, CeraWall Individual Duo and CeraFloor Select Duo. Two vertical outlets DN 50.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeves for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 45 – 238 mm
- fully removable, two-piece odor trap and rodding eye, 50 mm water seal (conforming to DIN EN 1253)
- hair sieves (can be used optionally)
- temporary blanking plates

MATERIAL

drain body and outlets polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)

	Required	Dallmer
DN 50	0,8 l/s	1,2/2,35 l/s

ITEM	DN	PART NO.
 drain body DallFlex 2.0 Duo vertical	DN 50	570109

Can be connected to British standard pipework with adaptor part No. 880727.

DALLMER Fire protection element DN 50

suitable for DallFlex 2.0 vertical and DallDrain vertical drain bodies. Fire protection tested and approved in accordance with German building regulations with approval number (abZ) Z-19.17-1543 and type approval (aBG) Z-19.53-2624.
For installation in core drill holes (d: 120-124 mm) in F 30/60/90/120 rated floors.

SPECIFICATION

- clamping element
- intumescent material
- flue gas seal

connects to:
plastic pipework DN 50 with couplings,
cast iron pipework DN 50 with DALLMER HT/SML pipe coupling DN 50/DN 50 (part-no. 880024)



ITEM	PART NO.
Fire protection element DN 50	545008

Ordering information:
For DallFlex 2.0 Duo vertical, two fire protection elements DN 50 are required.

build-in height 45 mm/30 mm
(without mounting feet)



drain body DallFlex 2.0 Duo vertical


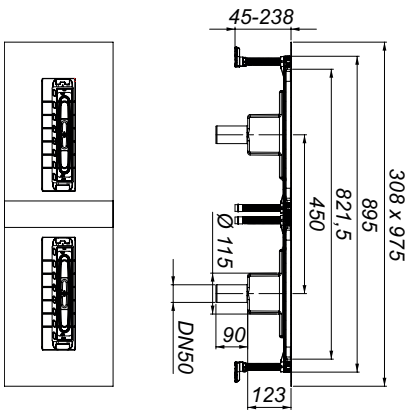


core drill: d: 120 mm

core drill for fire protection element DN 50:
d: 120 - 124 mm



Fire protection element DN 50



core drill: d: 120 - 124 mm

Drain body CeraFlex

DALLMER drain body CeraFlex

conforming to DIN EN 1253
for installation with shower channels CeraWall, CeraFloor, CeraFrame, Zentrix and CeraNiveau.
Outlet DN 50 horizontal, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- polymer concrete collar with steel mesh reinforcement
- separately packaged, flexible, click-on sealing sleeves for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound absorbing mounting feet for fixing and height adjustment 90 - 240 mm
- removable trap insert, 50 mm water seal (conforming to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlets polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)		
	Required	Dallmer
DN 50	0,8 l/s	0,61/0,83 l/s


ITEM	DN	PART NO.
drain body CeraFlex	DN 50	537140

Can be connected to British standard pipework with adaptor part No. 880727.

build-in height 90 mm




drain body CeraFlex

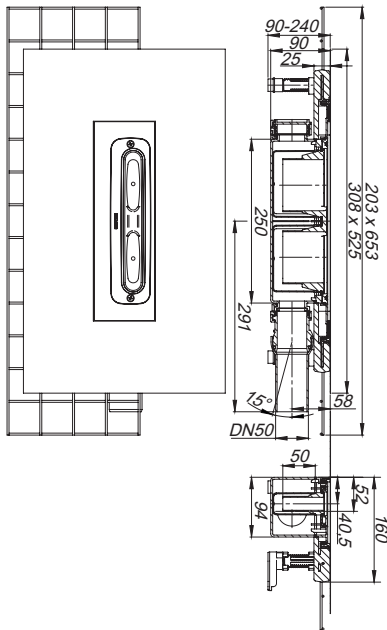


DALLMER sound-insulating element DallFlex/CeraFlex

for use with drain body DallFlex/CeraFlex and shower channels CeraFloor, CeraWall, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Tested to conform to DIN 4109/ VDI 4100, certificate P-BA 146/2015 (CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo) or P-BA 148/2015 (CeraWall).

ITEM	PART NO.
sound-insulating element DallFlex/CeraFlex	539090

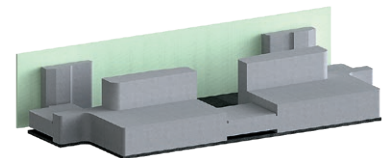

sound-insulating element DallFlex/CeraFlex

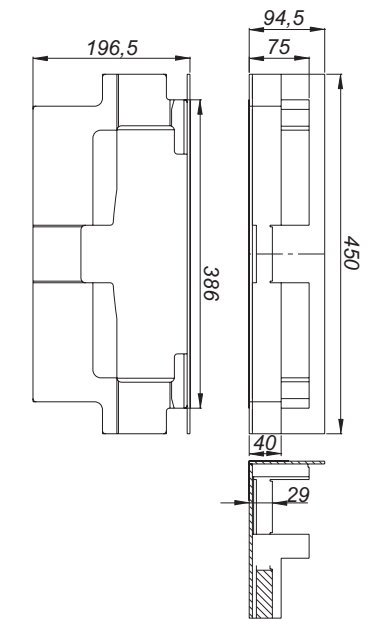

Drain body CeraFlex

DALLMER drain body CeraFlex Plan

for installation with shower channels CeraWall, CeraFloor, CeraFrame, Zentrix and CeraNiveau. Outlet DN 40 horizontal, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 degrees.

SPECIFICATION

- polymer concrete collar with steel mesh reinforcement
- separately packaged, flexible, click-on sealing sleeves for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound absorbing mounting feet for fixing and height adjustment 65 - 240 mm
- removable trap insert, 30 mm water seal (deviating to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlets polypropylene, highly impact-resistant


FLOW RATES ACCORDING TO DIN EN 1253-6 TAB. 7 (with 10/20 mm water over cover plate)		
	Required	Dallmer
DN 40	0,6 l/s	0,48/0,5 l/s

Floor drain in accordance with DIN EN 1253, minimum flow rate 0.4 l/s, suitable for one shower head!

ITEM	DN	PART NO.
drain body CeraFlex Plan	DN 40	537157

Can be connected to British standard pipework with adaptor part No. 880734.



build-in height 65 mm

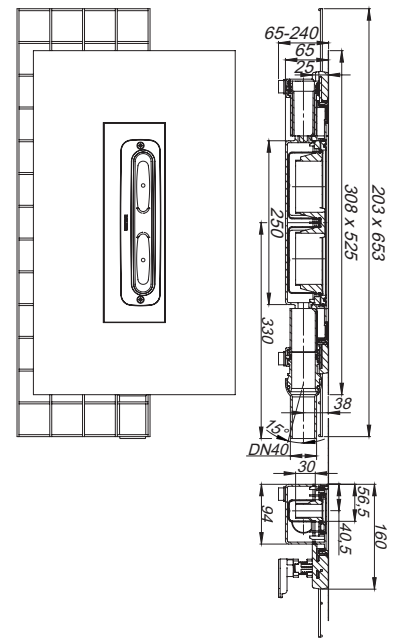

DALLMER sound-insulating element DallFlex/CeraFlex Plan

for use with drain body DallFlex Plan/CeraFlex Plan and shower channels CeraFloor, CeraWall, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Tested to conform to DIN 4109/VDI 4100, certificate P-BA 142/2015 (CeraFloor, CeraWall Individual, CeraFrame, Zentrix, CeraNiveau and CeraFrame Liquid Neo) and P-BA 144/2015 (CeraWall Select).

ITEM	PART NO.
sound-insulating element DallFlex/CeraFlex Plan	539106

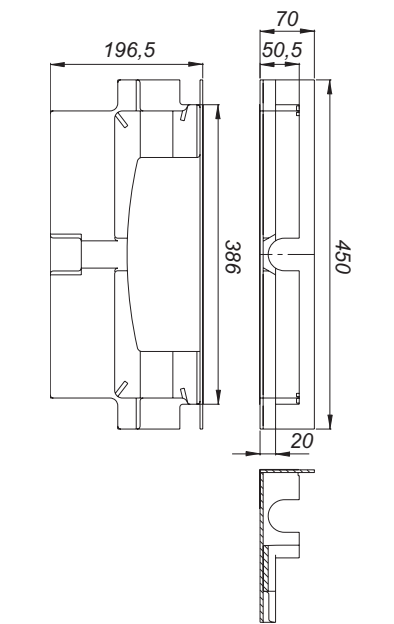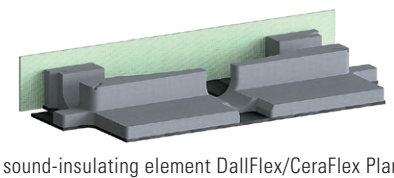

Drain body CeraFlex

DALLMER drain body CeraFlex vertical

conforming to DIN EN 1253
for installation with shower channels CeraWall, CeraFloor, CeraFrame, Zentrix and CeraNiveau.
Outlet DN 50 vertical.

SPECIFICATION

- polymer concrete collar with steel mesh reinforcement
- separately packaged, flexible, click-on sealing sleeves for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound absorbing mounting feet for fixing and height adjustment 45 - 240 mm
- removable trap insert, 50 mm water seal (conforming to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

drain body and outlets polypropylene, highly impact-resistant

FLOW RATES ACCORDING TO DIN EN 1253-1 TAB. 3 (with 10/20 mm water over cover plate)		
	Required	Dallmer
DN 50	0,8 l/s	0,8/1,0 l/s


ITEM	DN	PART NO.
 drain body CeraFlex vertical	DN 50	537164

Can be connected to British standard pipework with adaptor part No. 880727.

build-in height 45 mm
(without mounting feet 30 mm)



drain body CeraFlex vertical

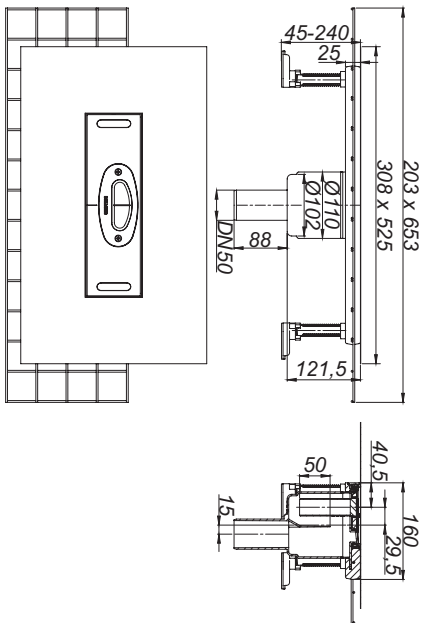

core drill: d: 120 mm

core drill for fire protection element DN 50.1:
d: 120 - 124 mm

DALLMER Fire protection element DN 50.1

suitable for drain body CeraFlex vertical.
Fire protection tested and approved in accordance with German building regulations with approval number (abZ) Z-19.17-1543 and type approval (aBG) Z-19.53-2624.
For installation in core drill holes (d: 120-124 mm) in F 30/60/90/120 rated floors.

SPECIFICATION



- clamping element
- intumescent material
- flue gas seal

connects to:
plastic pipework DN 50 with couplings,
cast iron pipework DN 50 with DALLMER HT/SML pipe coupling DN 50/DN 50 (part-no. 880024)

ITEM	PART NO.
Fire protection element DN 50.1	545015



Fire protection element DN 50.1



core drill: d: 120 - 124 mm

Accessories DallFlex 2.0

DALLMER trap insert DallFlex 2.0, mechanical

Mechanically operating trap insert without water seal.
Suitable for all drain bodies DallFlex 2.0.

SPECIFICATION


- magnetically closing flap
- bayonet lock
- backwater protection up to 0.12 bar

MATERIAL

polypropylene, highly impact-resistant



trap insert DallFlex 2.0, mechanisch



ITEM	PART NO.
trap insert DallFlex 2.0, mechanical	570369

DALLMER coupling

DN 40 or DN 50 compression joint with solvent weld socket BS EN 1455 1 1/2" or BS 5255 2"


MATERIAL

ABS

ITEM	DIMENSION	PART NO.
coupling	DN 40 x BS 1 1/2"	880734
coupling	DN 50 x BS 2"	880727



coupling



DALLMER PVC adhesive sleeve

for connecting DN 50 polypropylene drain bodies to DN 50 PVC pipes


MATERIAL

PVC

ITEM	DN	PART NO.
PVC adhesive sleeve	DN 50	691125



PVC adhesive sleeve



Shower channel CeraWall Select

DALLMER shower channel CeraWall Select satin stainless steel

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-28 mm; with CeraFlex: floor 12-28 mm, wall 12-28 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 5 mm solid, satin finished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select satin stainless steel	800 mm	535245
shower channel CeraWall Select satin stainless steel	900 mm	535146
shower channel CeraWall Select satin stainless steel	1000 mm	535153
shower channel CeraWall Select satin stainless steel	1100 mm	535160
shower channel CeraWall Select satin stainless steel	1200 mm	535177
shower channel CeraWall Select satin stainless steel	1300 mm	536457
shower channel CeraWall Select satin stainless steel	1400 mm	536464
shower channel CeraWall Select satin stainless steel	1500 mm	536471



shower channel CeraWall Select
satin stainless steel

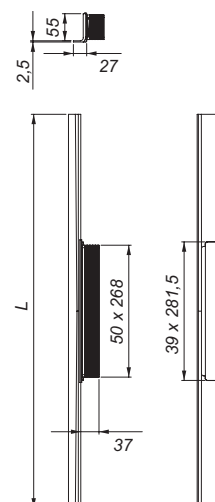

DALLMER shower channel CeraWall Select polished stainless steel

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-28 mm; with CeraFlex: floor 12-28 mm, wall 12-28 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 5 mm solid, mirror polished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select polished stainless steel	800 mm	535252
shower channel CeraWall Select polished stainless steel	900 mm	535108
shower channel CeraWall Select polished stainless steel	1000 mm	535115
shower channel CeraWall Select polished stainless steel	1100 mm	535122
shower channel CeraWall Select polished stainless steel	1200 mm	535139
shower channel CeraWall Select polished stainless steel	1300 mm	536419
shower channel CeraWall Select polished stainless steel	1400 mm	536426
shower channel CeraWall Select polished stainless steel	1500 mm	536433



shower channel CeraWall Select
polished stainless steel

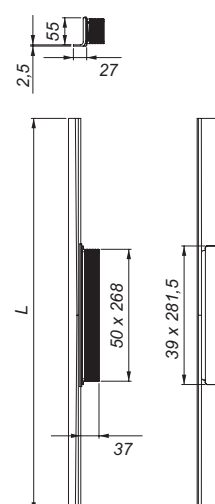

Ordering CeraWall Select:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Select as two components.

Shower channel CeraWall Select

DALLMER shower channel CeraWall Select black matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-28 mm; with CeraFlex: floor 12-28 mm, wall 12-28 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate



MATERIAL

304 stainless steel, 5 mm solid, load class K 3 (300 kg), PVD coating in black matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Select black matt	800 mm	535283
shower channel CeraWall Select black matt	900 mm	535306
shower channel CeraWall Select black matt	1000 mm	535313
shower channel CeraWall Select black matt	1100 mm	535320
shower channel CeraWall Select black matt	1200 mm	535337



shower channel CeraWall Select black matt

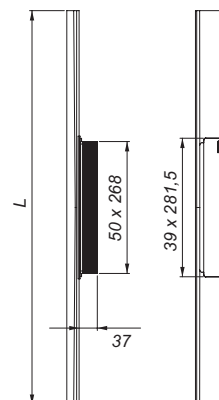

DALLMER shower channel CeraWall Select red gold matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-28 mm; with CeraFlex: floor 12-28 mm, wall 12-28 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate



MATERIAL

304 stainless steel, 5 mm solid, load class K 3 (300 kg), PVD coating in red gold matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Select red gold matt	800 mm	535344
shower channel CeraWall Select red gold matt	900 mm	535351
shower channel CeraWall Select red gold matt	1000 mm	535368
shower channel CeraWall Select red gold matt	1100 mm	535375
shower channel CeraWall Select red gold matt	1200 mm	535382



shower channel CeraWall Select red gold matt

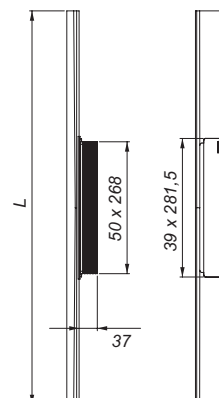

Ordering CeraWall Select:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Select as two components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.

Shower channel CeraWall Select

DALLMER shower channel CeraWall Select brass matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-28 mm; with CeraFlex: floor 12-28 mm, wall 12-28 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

304 stainless steel, 5 mm solid, load class K 3 (300 kg), PVD coating in brass matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Select brass matt	800 mm	535399
shower channel CeraWall Select brass matt	900 mm	535405
shower channel CeraWall Select brass matt	1000 mm	535412
shower channel CeraWall Select brass matt	1100 mm	535429
shower channel CeraWall Select brass matt	1200 mm	535436

Ordering CeraWall Select:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Select as two components.



Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



reddot design award
winner 2015



shower channel CeraWall Select brass matt

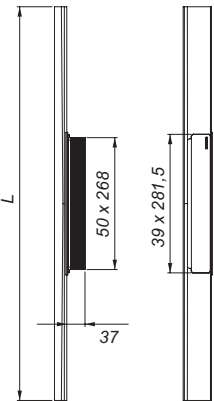

Shower channel CeraWall Select Duo

DALLMER shower channel CeraWall Select Duo satin stainless steel

for installation with all drain bodies DallFlex 2.0 Duo. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- two cover plates
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate with integrated level


MATERIAL

304 stainless steel, 5 mm solid, satin finished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select Duo satin stainless steel	1300 mm	536181
shower channel CeraWall Select Duo satin stainless steel	1400 mm	536198
shower channel CeraWall Select Duo satin stainless steel	1500 mm	536204
shower channel CeraWall Select Duo satin stainless steel	1600 mm	536211
shower channel CeraWall Select Duo satin stainless steel	1700 mm	536228
shower channel CeraWall Select Duo satin stainless steel	1800 mm	536235
shower channel CeraWall Select Duo satin stainless steel	1900 mm	536242
shower channel CeraWall Select Duo satin stainless steel	2000 mm	536259



shower channel CeraWall Select Duo
satin stainless steel

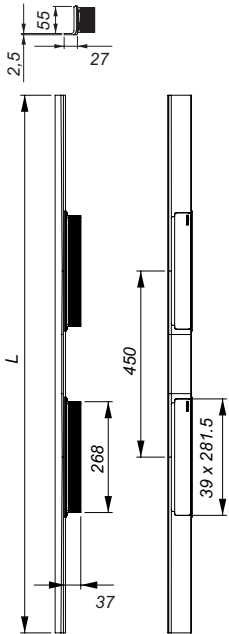

DALLMER shower channel CeraWall Select Duo polished stainless steel

for installation with all drain bodies DallFlex 2.0 Duo. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- two cover plates
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate with integrated level


MATERIAL

304 stainless steel, 5 mm solid, mirror polished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select Duo polished stainless steel	1300 mm	536105
shower channel CeraWall Select Duo polished stainless steel	1400 mm	536112
shower channel CeraWall Select Duo polished stainless steel	1500 mm	536129
shower channel CeraWall Select Duo polished stainless steel	1600 mm	536136
shower channel CeraWall Select Duo polished stainless steel	1700 mm	536143
shower channel CeraWall Select Duo polished stainless steel	1800 mm	536150
shower channel CeraWall Select Duo polished stainless steel	1900 mm	536167
shower channel CeraWall Select Duo polished stainless steel	2000 mm	536174



shower channel CeraWall Select Duo
polished stainless steel

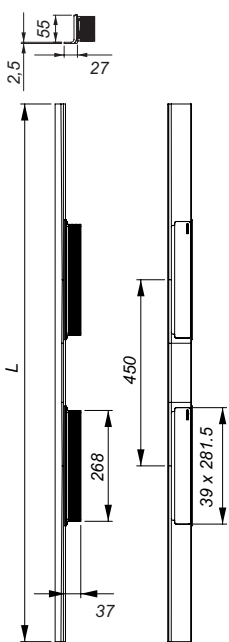

Ordering CeraWall Select Duo:

Please order drain body DallFlex 2.0 Duo + shower channel CeraWall Select Duo as two separate components.

Shower channel CeraWall Individual

DALLMER shower channel CeraWall Individual

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, for installation at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- scribe template
- temporary blanking plate


MATERIAL

304 stainless steel

ITEM	LENGTH	PART NO.
shower channel CeraWall Individual	800 mm	535269
shower channel CeraWall Individual	900 mm	535207
shower channel CeraWall Individual	1000 mm	535214
shower channel CeraWall Individual	1100 mm	535221
shower channel CeraWall Individual	1200 mm	535238
shower channel CeraWall Individual	1300 mm	536518
shower channel CeraWall Individual	1400 mm	536525
shower channel CeraWall Individual	1500 mm	536532



shower channel CeraWall Individual

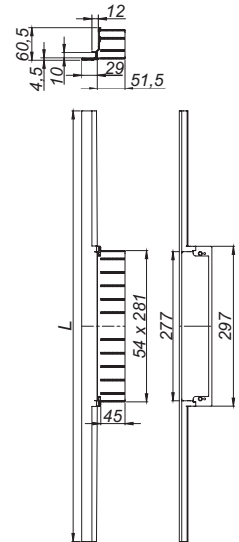

DALLMER shower channel CeraWall Individual black matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, for installation at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- scribe template
- temporary blanking plate


MATERIAL

304 stainless steel, PVD coating in black matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Individual black matt	800 mm	535603
shower channel CeraWall Individual black matt	900 mm	535627
shower channel CeraWall Individual black matt	1000 mm	535634
shower channel CeraWall Individual black matt	1100 mm	535641
shower channel CeraWall Individual black matt	1200 mm	535658



shower channel CeraWall Individual black matt

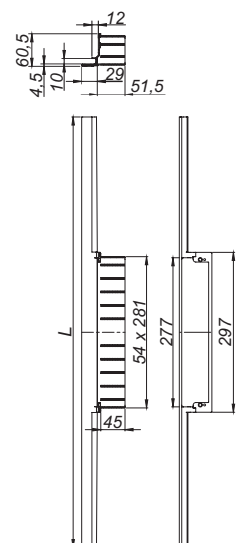

Ordering CeraWall Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Individual + cover plate as three components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.

Shower channel CeraWall Individual

DALLMER shower channel CeraWall Individual red gold matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, for installation at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- scribe template
- temporary blanking plate


MATERIAL

304 stainless steel, PVD coating in red gold matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Individual red gold matt	800 mm	536891
shower channel CeraWall Individual red gold matt	900 mm	536907
shower channel CeraWall Individual red gold matt	1000 mm	536914
shower channel CeraWall Individual red gold matt	1100 mm	536921
shower channel CeraWall Individual red gold matt	1200 mm	536938



shower channel CeraWall Individual red gold matt

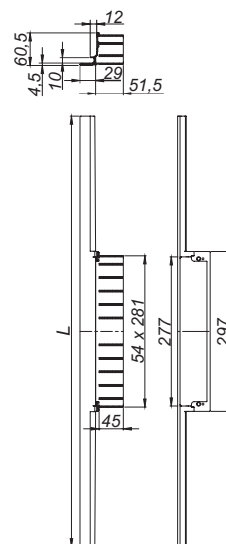

DALLMER shower channel CeraWall Individual brass matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, for installation at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.


SPECIFICATION

- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- scribe template
- temporary blanking plate


MATERIAL

304 stainless steel, PVD coating in brass matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Individual brass matt	800 mm	536945
shower channel CeraWall Individual brass matt	900 mm	536952
shower channel CeraWall Individual brass matt	1000 mm	536969
shower channel CeraWall Individual brass matt	1100 mm	536976
shower channel CeraWall Individual brass matt	1200 mm	535665



shower channel CeraWall Individual brass matt

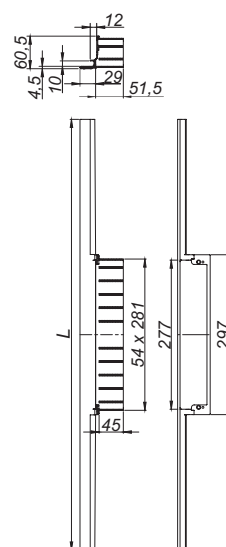

Ordering CeraWall Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Individual + cover plate as three components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.

Shower channel CeraWall Individual

DALLMER cover plate CeraWall Individual

cover plate for shower channel CeraWall Individual.

MATERIAL

304 stainless steel or

304 stainless steel, PVD coating in black matt, red gold matt or brass matt


- **cover plate CeraWall Individual**
for flooring with unfinished cut edges (e.g. glazed tiles).
- **cover plate CeraWall Individual natural stone**
for flooring with polished cut edges or self-colour floor finish
(e.g. natural stone, porcelain stoneware tiles).
- **cover plate CeraWall Individual Design**
all-purpose design in stainless steel design, not to be tiled.

ITEM	PART NO.
cover plate CeraWall Individual satin stainless steel	535023
cover plate CeraWall Individual black matt	537003
cover plate CeraWall Individual red gold matt	537027
cover plate CeraWall Individual brass matt	537041
cover plate CeraWall Individual natural stone	535030
cover plate CeraWall Individual Design satin stainless steel	535047
cover plate CeraWall Individual Design black matt	537010
cover plate CeraWall Individual Design red gold matt	537034
cover plate CeraWall Individual Design brass matt	537058


Ordering CeraWall Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Individual + cover plate as three components.


Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



cover plate CeraWall Individual



cover plate CeraWall Individual natural stone



cover plate CeraWall Individual Design

Shower channel CeraWall Individual Duo

DALLMER shower channel CeraWall Individual Duo

for installation with all drain bodies DallFlex 2.0 Duo. Concealed channel with integrated fall, for installation at the junction of wall and floor. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, wall: 12-28 mm, incl. adhesive and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- scribe template
- temporary blanking plate


MATERIAL

304 stainless steel

ITEM	LENGTH	PART NO.
shower channel CeraWall Individual Duo	1300 mm	536020
shower channel CeraWall Individual Duo	1400 mm	536037
shower channel CeraWall Individual Duo	1500 mm	536044
shower channel CeraWall Individual Duo	1600 mm	536051
shower channel CeraWall Individual Duo	1700 mm	536068
shower channel CeraWall Individual Duo	1800 mm	536075
shower channel CeraWall Individual Duo	1900 mm	536082
shower channel CeraWall Individual Duo	2000 mm	536099



shower channel CeraWall Individual Duo

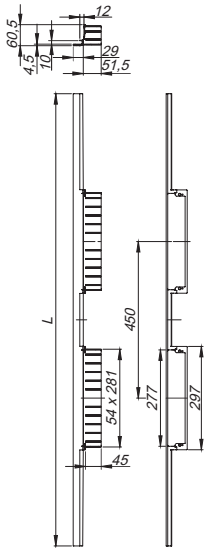

DALLMER cover plate CeraWall Individual Duo

each with two cover plates for shower channel CeraWall Individual Duo.

MATERIAL


304 stainless steel

- ▶ **cover plate CeraWall Individual Duo**
for flooring with unfinished cut edges (e.g. glazed tiles).
- ▶ **cover plate CeraWall Individual Duo natural stone**
for flooring with polished cut edges or self-colour floor finish (e.g. natural stone, porcelain stoneware tiles).
- ▶ **cover plate CeraWall Individual Duo Design**
all-purpose design in stainless steel design, not to be tiled.


ITEM	ART.-NR.
cover plate CeraWall Individual Duo	535191
cover plate CeraWall Individual Duo natural stone	535184
cover plate CeraWall Individual Duo Design	535092




cover plate CeraWall Individual Duo

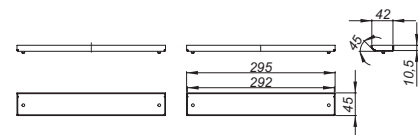

cover plate CeraWall Individual Duo natural stone



cover plate CeraWall Individual Duo Design



Ordering CeraWall Individual Duo:
Please order drain body DallFlex 2.0 Duo + shower channel CeraWall Individual Duo + cover plate Duo as three separate components.

Shower channel CeraWall Pure

DALLMER shower channel CeraWall Pure

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage-strip with integrated fall, visibly installed at the junction of wall and floor. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-28 mm; with CeraFlex: floor 12-28 mm, wall 12-28 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- self-adhesive sound insulating tape
- accessories for installation and positioning
- temporary blanking plate

MATERIAL


304 stainless steel, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Pure	900 mm	538475
shower channel CeraWall Pure	1000 mm	538482
shower channel CeraWall Pure	1200 mm	538499

Ordering CeraWall Pure:
Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraWall Pure as two components.



shower channel CeraWall Pure

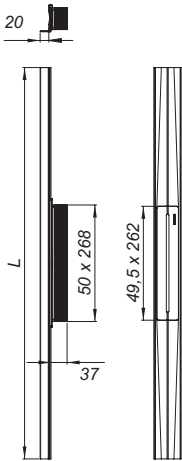


DALLMER security tape S 3

self-adhesive tape with cut-resistant stainless steel mesh.

ITEM	LENGTH	PART NO.
security tape S 3	1200 mm	538505



security tape S 3



Shower channel CeraFloor Select

DALLMER shower channel CeraFloor Select satin stainless steel

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-25 mm; with CeraFlex: floor 12-28 mm, wall 12-24 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 6 mm solid, satin finished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select satin stainless steel	800 mm	538000
shower channel CeraFloor Select satin stainless steel	900 mm	538024
shower channel CeraFloor Select satin stainless steel	1000 mm	538048
shower channel CeraFloor Select satin stainless steel	1100 mm	538055
shower channel CeraFloor Select satin stainless steel	1200 mm	538062
shower channel CeraFloor Select satin stainless steel	1300 mm	538079
shower channel CeraFloor Select satin stainless steel	1400 mm	538086
shower channel CeraFloor Select satin stainless steel	1500 mm	538093



shower channel CeraFloor Select
satin stainless steel

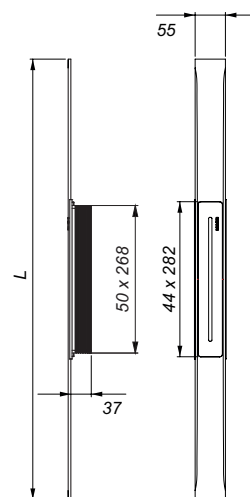

DALLMER shower channel CeraFloor Select polished stainless steel

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-25 mm; with CeraFlex: floor 12-28 mm, wall 12-24 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 6 mm solid, mirror polished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select polished stainless steel	800 mm	538109
shower channel CeraFloor Select polished stainless steel	900 mm	538123
shower channel CeraFloor Select polished stainless steel	1000 mm	538147
shower channel CeraFloor Select polished stainless steel	1100 mm	538154
shower channel CeraFloor Select polished stainless steel	1200 mm	538161
shower channel CeraFloor Select polished stainless steel	1300 mm	538178
shower channel CeraFloor Select polished stainless steel	1400 mm	538185
shower channel CeraFloor Select polished stainless steel	1500 mm	538192



shower channel CeraFloor Select
polished stainless steel

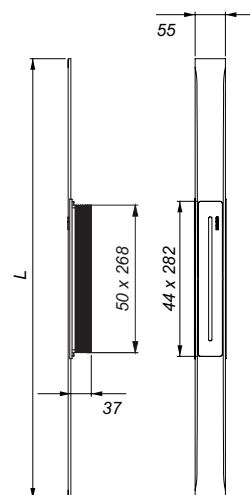

Ordering CeraFloor Select:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Select as two components.

Shower channel CeraFloor Select

DALLMER shower channel CeraFloor Select black matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-25 mm; with CeraFlex: floor 12-28 mm, wall 12-24 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 6 mm solid, load class K 3 (300 kg), PVD coating in black matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select black matt	800 mm	538239
shower channel CeraFloor Select black matt	900 mm	538253
shower channel CeraFloor Select black matt	1000 mm	538277
shower channel CeraFloor Select black matt	1100 mm	538284
shower channel CeraFloor Select black matt	1200 mm	538291



shower channel CeraFloor Select black matt

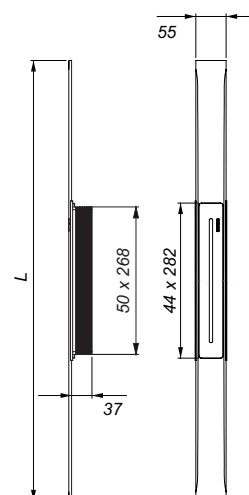

DALLMER shower channel CeraFloor Select red gold matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-25 mm; with CeraFlex: floor 12-28 mm, wall 12-24 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 6 mm solid, load class K 3 (300 kg), PVD coating in red gold matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select red gold matt	800 mm	538307
shower channel CeraFloor Select red gold matt	900 mm	538321
shower channel CeraFloor Select red gold matt	1000 mm	538345
shower channel CeraFloor Select red gold matt	1100 mm	538352
shower channel CeraFloor Select red gold matt	1200 mm	538369



shower channel CeraFloor Select red gold matt

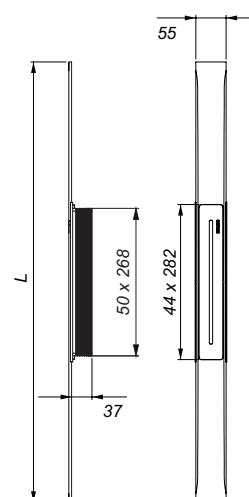

Ordering CeraFloor Select:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Select as two components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.

Shower channel CeraFloor Select

DALLMER shower channel CeraFloor Select brass matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-25 mm; with CeraFlex: floor 12-28 mm, wall 12-24 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- two cover plates
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

304 stainless steel, 6 mm solid, load class K 3 (300 kg), PVD coating in brass matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select brass matt	800 mm	538376
shower channel CeraFloor Select brass matt	900 mm	538390
shower channel CeraFloor Select brass matt	1000 mm	538413
shower channel CeraFloor Select brass matt	1100 mm	538420
shower channel CeraFloor Select brass matt	1200 mm	538437


Ordering CeraFloor Select:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Select as two components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



shower channel CeraFloor Select brass matt

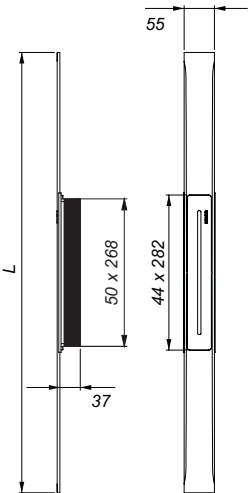

Shower channel CeraFloor Select Duo

DALLMER shower channel CeraFloor Select Duo satin stainless steel

for installation with all drain bodies DallFlex 2.0 Duo. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 8-36 mm, wall: 8-25 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- two cover plates
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 6 mm solid, satin finished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select Duo satin stainless steel	1300 mm	537539
shower channel CeraFloor Select Duo satin stainless steel	1400 mm	537577
shower channel CeraFloor Select Duo satin stainless steel	1500 mm	537584
shower channel CeraFloor Select Duo satin stainless steel	1600 mm	537591
shower channel CeraFloor Select Duo satin stainless steel	1700 mm	537607
shower channel CeraFloor Select Duo satin stainless steel	1800 mm	537614
shower channel CeraFloor Select Duo satin stainless steel	1900 mm	537621
shower channel CeraFloor Select Duo satin stainless steel	2000 mm	537638



shower channel CeraFloor Select Duo
satin stainless steel

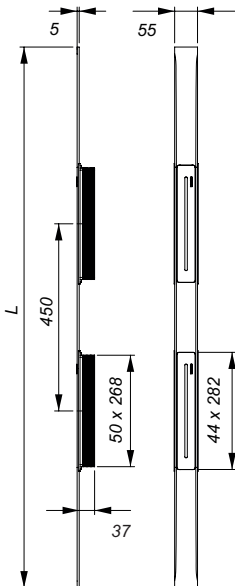

DALLMER shower channel CeraFloor Select Duo polished stainless steel

for installation with all drain bodies DallFlex 2.0 Duo. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 8-36 mm, wall: 8-25 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- two cover plates
- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, 6 mm solid, mirror polished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select Duo polished stainless steel	1300 mm	537447
shower channel CeraFloor Select Duo polished stainless steel	1400 mm	537454
shower channel CeraFloor Select Duo polished stainless steel	1500 mm	537461
shower channel CeraFloor Select Duo polished stainless steel	1600 mm	537485
shower channel CeraFloor Select Duo polished stainless steel	1700 mm	537492
shower channel CeraFloor Select Duo polished stainless steel	1800 mm	537508
shower channel CeraFloor Select Duo polished stainless steel	1900 mm	537515
shower channel CeraFloor Select Duo polished stainless steel	2000 mm	537522



shower channel CeraFloor Select Duo
polished stainless steel

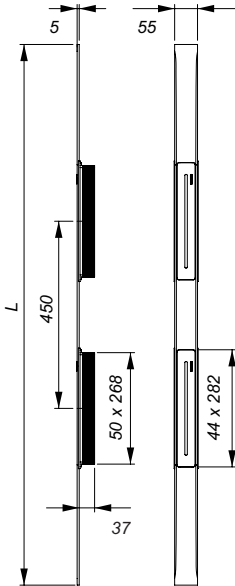

Ordering CeraFloor Select Duo:

Please order drain body DallFlex 2.0 Duo + shower channel CeraFloor Select Duo as two components.

Shower channel CeraFloor Select Duo

DALLMER shower channel CeraFloor Select Duo black matt

for installation with all drain bodies DallFlex 2.0 Duo. Drainage strip with engineered precision fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 8-36 mm, wall: 8-25 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- two cover plates
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

304 stainless steel, 6 mm solid, load class K 3 (300 kg), PVD coating in black matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select Duo black matt	1300 mm	537676
shower channel CeraFloor Select Duo black matt	1400 mm	537683
shower channel CeraFloor Select Duo black matt	1500 mm	537690
shower channel CeraFloor Select Duo black matt	1600 mm	537706
shower channel CeraFloor Select Duo black matt	1700 mm	537713
shower channel CeraFloor Select Duo black matt	1800 mm	537720
shower channel CeraFloor Select Duo black matt	1900 mm	537737
shower channel CeraFloor Select Duo black matt	2000 mm	537775

Colours red gold matt + brass matt on request!


Ordering CeraFloor Select Duo:

Please order drain body DallFlex 2.0 Duo + shower channel CeraFloor Select Duo as two components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



shower channel CeraFloor Select Duo black matt

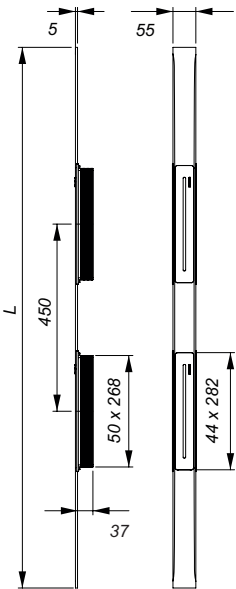

Shower channel CeraFloor Individual

DALLMER shower channel CeraFloor Individual

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, incl. adhesive and bonded waterproofing), can be adjusted to lengths of 1500 - 800 mm with millimetre precision.

SPECIFICATION

- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraFloor Individual	800-1500 mm	537478



shower channel CeraFloor Individual



DALLMER shower channel CeraFloor Individual black matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, incl. adhesive and bonded waterproofing), can be adjusted to lengths of 1500 - 800 mm with millimetre precision.

SPECIFICATION

- accessories for installation and positioning
- temporary blanking plate


MATERIAL

304 stainless steel, load class K 3 (300 kg), PVD coating in black matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Individual black matt	800-1500 mm	537546



shower channel CeraFloor Individual
black matt

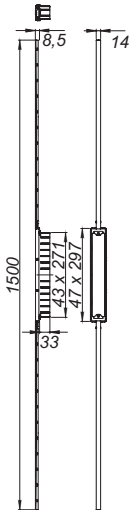

Ordering CeraFloor Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Individual + cover plate CeraFloor/CeraFrame as three components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.

Shower channel CeraFloor Individual

DALLMER shower channel CeraFloor Select red gold matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, incl. adhesive and bonded waterproofing), can be adjusted to lengths of 1500 - 800 mm with millimetre precision.


SPECIFICATION

- accessories for installation and positioning
- temporary blanking plate

MATERIAL

304 stainless steel, load class K 3 (300 kg), PVD coating in red gold matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select red gold matt	800-1500 mm	537645

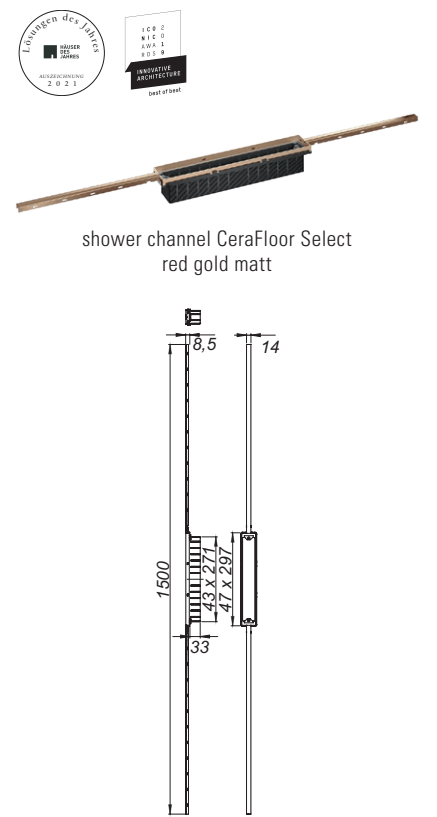

DALLMER shower channel CeraFloor Select brass matt

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Concealed channel with integrated fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (floor: 12-28 mm, incl. adhesive and bonded waterproofing), can be adjusted to lengths of 1500 - 800 mm with millimetre precision.


SPECIFICATION

- accessories for installation and positioning
- temporary blanking plate

MATERIAL

304 stainless steel, load class K 3 (300 kg), PVD coating in brass matt

ITEM	LENGTH	PART NO.
shower channel CeraFloor Select brass matt	800-1500 mm	537744

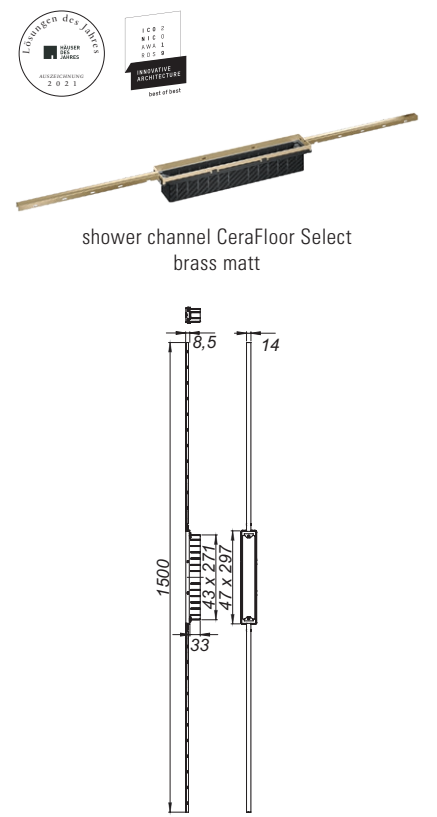

Ordering CeraFloor Individual:
Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Individual + cover plate CeraFloor/CeraFrame as three components.
Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.

Shower channel CeraFloor Individual

DALLMER cover plate CeraFloor/CeraFrame Individual

cover plate for shower channel CeraFloor Individual and CeraFrame Individual.

MATERIAL

304 stainless steel or
304 stainless steel, PVD coating in black matt, red gold matt or brass matt

- **cover plate CeraFloor/CeraFrame Individual**
for tiling with individual floor coverings.
- **cover plate CeraFloor/CeraFrame Individual Design**
all-purpose design in stainless steel design, not to be tiled.

ITEM	PART NO.
cover plate CeraFloor/CeraFrame Individual satin stainless steel	537379
cover plate CeraFloor/CeraFrame Individual black matt	537553
cover plate CeraFloor/CeraFrame Individual red gold matt	537652
cover plate CeraFloor/CeraFrame Individual brass matt	537751
cover plate CeraFloor/CeraFrame Individual Design satin stainless steel	537386
cover plate CeraFloor/CeraFrame Individual Design black matt	537560
cover plate CeraFloor/CeraFrame Individual Design red gold matt	537669
cover plate CeraFloor/CeraFrame Individual Design brass matt	537768

Ordering CeraFloor Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Individual + cover plate CeraFloor/CeraFrame Individual!

Ordering CeraFrame Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFrame Individual + cover plate CeraFloor/CeraFrame Individual!

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



cover plate CeraFloor/CeraFrame Individual
satin stainless steel




cover plate CeraFloor/CeraFrame Individual
black matt



cover plate CeraFloor/CeraFrame Individual
red gold matt



cover plate CeraFloor/CeraFrame Individual
brass matt



cover plate CeraFloor/CeraFrame Individual Design
satin stainless steel




cover plate CeraFloor/CeraFrame Individual Design
black matt



cover plate CeraFloor/CeraFrame Individual Design
red gold matt



cover plate CeraFloor/CeraFrame Individual Design
brass matt



Shower channel CeraFloor Pure

DALLMER shower channel CeraFloor Pure

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Drainage strip with integrated transverse fall, flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-36 mm, wall: 8-25 mm; with CeraFlex: floor 12-28 mm, wall 12-24 mm, incl. adhesive bed and bonded waterproofing), length can be adjusted to the millimeter.

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

304 stainless steel, load class K 3 (300 kg)


ITEM	LENGTH	PART NO.
shower channel CeraFloor Pure	900 mm	538208
shower channel CeraFloor Pure	1000 mm	538215
shower channel CeraFloor Pure	1200 mm	538222

Ordering CeraFloor Pure:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Pure as two components.



shower channel CeraFloor Pure

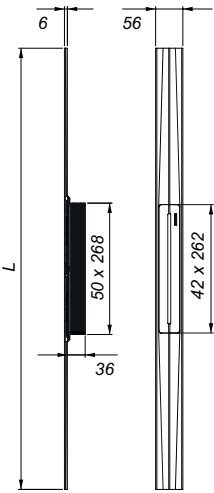

Shower channel Zentrix

DALLMER shower channel Zentrix

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 8-34 mm; with CeraFlex: floor 11-38 mm, incl. adhesive bed and bonded waterproofing)

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

spigot ABS, 304 stainless steel frame, 300 x 50 mm.

- ▶ **shower channel Zentrix satin stainless steel**
grate 304 stainless steel satin finished, load class K 3 (300 kg)
- ▶ **shower channel Zentrix polished stainless steel**
grate 304 stainless steel mirror polished, load class K 3 (300 kg)
- ▶ **shower channel Zentrix black matt**
grate 304 stainless steel, PVD coating in black matt, load class K 3 (300 kg)
- ▶ **shower channel Zentrix red gold matt**
grate 304 stainless steel, PVD coating in red gold matt, load class K 3 (300 kg)
- ▶ **shower channel Zentrix brass matt**
grate 304 stainless steel, PVD coating in brass matt, load class K 3 (300 kg)

ITEM	DIMENSION	PART NO.
shower channel Zentrix satin stainless steel	300 x 50 mm	511317
shower channel Zentrix polished stainless steel	300 x 50 mm	511324
shower channel Zentrix black matt	300 x 50 mm	511331
shower channel Zentrix red gold matt	300 x 50 mm	511348
shower channel Zentrix brass matt	300 x 50 mm	511355

Ordering shower channel Zentrix:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel Zentrix as two components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



reddot design award
best of the best 2008



iF product design award
2008



Zentrix satin stainless steel



Zentrix polished stainless steel




Zentrix satin black matt



Zentrix satin red gold matt



Zentrix satin brass matt



Shower channel CeraNiveau

DALLMER shower channel CeraNiveau

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 9-30 mm; with CeraFlex: floor 9-34 mm, incl. adhesive bed and bonded waterproofing).

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

spigot ABS, 304 stainless steel frame, 300 x 100 mm.

- ▶ **shower channel CeraNiveau satin stainless steel**
grate 304 stainless steel satin finished, load class K 3 (300 kg)
- ▶ **shower channel CeraNiveau polished stainless steel**
grate 304 stainless steel mirror polished, load class K 3 (300 kg)
- ▶ **shower channel CeraNiveau black matt**
grate 304 stainless steel, PVD coating in black matt, load class K 3 (300 kg)
- ▶ **shower channel CeraNiveau red gold matt**
grate 304 stainless steel, PVD coating in red gold matt, load class K 3 (300 kg)
- ▶ **shower channel CeraNiveau brass matt**
grate 304 stainless steel, PVD coating in brass matt, load class K 3 (300 kg)

ITEM	DIMENSION	PART NO.
shower channel CeraNiveau satin stainless steel	300 x 100 mm	511362
shower channel CeraNiveau polished stainless steel	300 x 100 mm	511379
shower channel CeraNiveau black matt	300 x 100 mm	511386
shower channel CeraNiveau red gold matt	300 x 100 mm	511058
shower channel CeraNiveau brass matt	300 x 100 mm	511065

Ordering shower channel CeraNiveau:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraNiveau as two components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



reddot design award
winner 2007



if product design
award
2007



DESIGNPREIS
2008
NOMINIERT



Cera Niveau satin stainless steel



Cera Niveau polished stainless steel




Cera Niveau black matt



Cera Niveau red gold matt



Cera Niveau brass matt

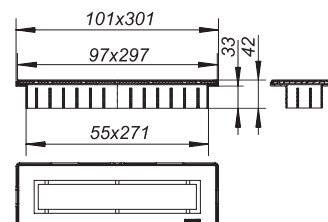

Shower channel CeraFrame Individual

DALLMER shower channel CeraFrame Individual

for installation with all drain bodies DallFlex 2.0 and CeraFlex. Flush-mounted in the shower area. Suitable for ceramic and natural stone coverings (with DallFlex 2.0: floor 9-38 mm; with CeraFlex: floor 12-38 mm, incl. adhesive bed and bonded waterproofing).

SPECIFICATION

- cover plate
- accessories for installation and positioning
- temporary blanking plate

MATERIAL

spigot ABS, 304 stainless steel frame, 300 x 50 mm.

- ▶ **shower channel CeraFrame Individual**
304 stainless steel satin finished, load class K 3 (300 kg)
- ▶ **shower channel CeraFrame Individual black matt**
304 stainless steel, PVD coating in black matt, load class K 3 (300 kg)
- ▶ **shower channel CeraFrame Individual red gold matt**
304 stainless steel, PVD coating in red gold matt, load class K 3 (300 kg)
- ▶ **shower channel CeraFrame Individual brass matt**
304 stainless steel, PVD coating in brass matt, load class K 3 (300 kg)

ITEM	DIMENSION	PART NO.
shower channel CeraFrame Individual	300 x 50 mm	537331
shower channel CeraFrame Individual black matt	300 x 50 mm	537348
shower channel CeraFrame Individual red gold matt	300 x 50 mm	537355
shower channel CeraFrame Individual brass matt	300 x 50 mm	537362

Ordering shower channel CeraFrame Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFrame Individual + cover plate CeraFloor/CeraFrame Individual as three components.

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



CeraFrame Individual




CeraFrame Individual black matt



CeraFrame Individual red gold matt



CeraFrame Individual brass matt

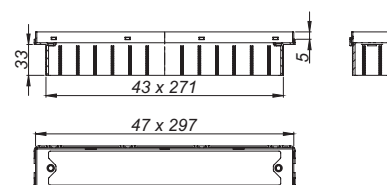

Shower channel CeraFloor Individual

DALLMER cover plate CeraFloor/CeraFrame Individual

cover plate for shower channel CeraFloor Individual and CeraFrame Individual.

MATERIAL

304 stainless steel or

304 stainless steel, PVD coating in black matt, red gold matt or brass matt

- **cover plate CeraFloor/CeraFrame Individual**
for tiling with individual floor coverings.
- **cover plate CeraFloor/CeraFrame Individual Design**
all-purpose design in stainless steel design, not to be tiled.

ITEM	PART NO.
cover plate CeraFloor/CeraFrame Individual satin stainless steel	537379
cover plate CeraFloor/CeraFrame Individual black matt	537553
cover plate CeraFloor/CeraFrame Individual red gold matt	537652
cover plate CeraFloor/CeraFrame Individual brass matt	537751
cover plate CeraFloor/CeraFrame Individual Design satin stainless steel	537386
cover plate CeraFloor/CeraFrame Individual Design black matt	537560
cover plate CeraFloor/CeraFrame Individual Design red gold matt	537669
cover plate CeraFloor/CeraFrame Individual Design brass matt	537768

Ordering CeraFloor Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFloor Individual + cover plate CeraFloor/CeraFrame Individual!

Ordering CeraFrame Individual:

Please order drain body DallFlex 2.0 or CeraFlex + shower channel CeraFrame Individual + cover plate CeraFloor/CeraFrame Individual!

Due to the technological production possibilities, the nature of the raw material and the lighting conditions, there may be slight colour deviations in the PVD surfaces.



cover plate CeraFloor/CeraFrame Individual
satin stainless steel




cover plate CeraFloor/CeraFrame Individual
black matt



cover plate CeraFloor/CeraFrame Individual
red gold matt



cover plate CeraFloor/CeraFrame Individual
brass matt



cover plate CeraFloor/CeraFrame Individual Design
satin stainless steel




cover plate CeraFloor/CeraFrame Individual Design
black matt



cover plate CeraFloor/CeraFrame Individual Design
red gold matt



cover plate CeraFloor/CeraFrame Individual Design
brass matt



Shower channel CeraFrame Liquid Neo

DALLMER shower channel CeraFrame Liquid Neo

for installation with all DallFlex 2.0 drain bodies in trowelled jointless thin-layer floor coatings of selected manufacturers. Suitable for coatings with total construction height of 4.5 mm incl. waterproofing.


SPECIFICATION

- coatable cover plate 255 x 32 mm
- two-level troweling aid
- temporary blanking plate


MATERIAL

304 stainless steel, 300 x 91 mm, 8 mm solid, frame 270 x 47 mm, load class K 3 (300 kg)

ITEM	DIMENSION	PART NO.
shower channel CeraFrame Liquid Neo	270 x 47 mm	570499

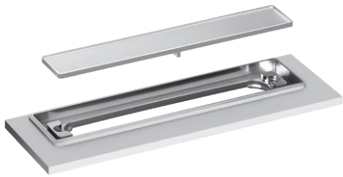

CeraFrame Liquid Neo

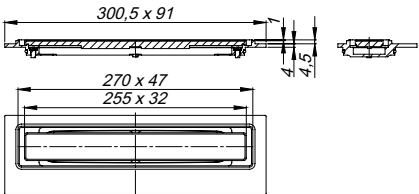

Service

Our products at a glance

Help for planning and installation

Discover our diverse drainage systems and get an overview of our product categories on our website dallmer.com

Planners, architects and installation technicians can visit dallmer.com/service for useful tools and documents which provide them with support during the entire process, from planning to installation.



Installation instructions



DXF drawings



Data sheets



BIM – building information modelling



System sections



Configurator

The Dallmer Sessions
live.video.online.



If you are abreast of the state-of-the-art of drainage technologies, changes to standards and directives, and current bathroom trends, you have a clear advantage which you can pass on to your customers. Dallmer's training opportunities now make it even easier to keep up to date.

For more information and current scheduled events, visit dallmer.com/sessions

10-year warranty*

A promise which we are happy for you to pass on to your customers.

Dallmer GmbH + Co. KG
Wiebelsheidestraße 25
59757 Arnsberg
Germany

T +49 2932 9616-0
E info@dallmer.de
W dallmer.com

DW20059 / 09/2025_PDF
WEEE-Reg.-Nr. DE 98946358