




Grease collector


Connection under sink

- Tank in 100% recyclable rotomoulded polyethylene with lifting rings.
- Inlet and outlet sleeve in PVC or seals in nitrile.
- Polyethylene cover with 6 screws on an O-ring for a perfect seal.



To help with cleaning,
raise the unit

PVC valve
(Option/Ref: 11417)

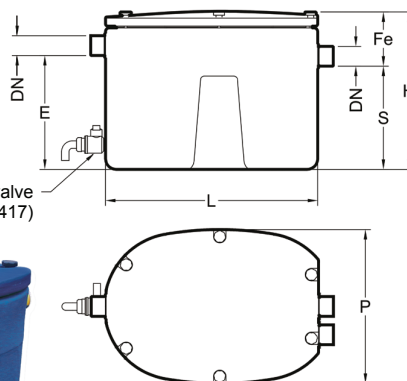

Restaurant
dishwashing
sink special

- Useful volume = **55 litres**
- Max. admissible flow rate = **0.15 l/s.**
- Weight = **10 kg**

Maintenance: it must be daily depending on the pollutant load sent to the unit.

GME range	Nominal size l/s	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Separator Volume
GM1E	0.15	600	435	450	325	295	155	50	10	55

Dimensions are in millimetres, weights in kilograms, volumes in litres.

Options


1. 1/4-turn PVC valve p.73



Grease separators


above ground installation special

- Completely **stainless steel** unit: corrosion-proof.
- Rotating flange in lower part** DN080 for connection to the drain column (not included).
- Overall width 660 mm** to pass easily through doors.
- Wide opening at 90° from the cover** for easy unit maintenance
- Bracket** held in open position for more safety
- Reversible cover.**
- DN100 stainless steel **vent**.

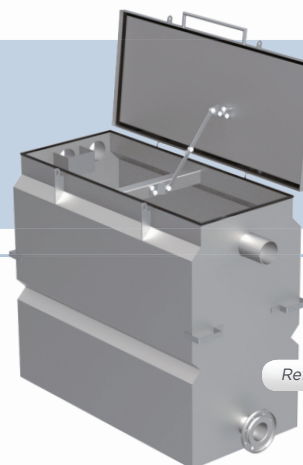

Ref. EDGS02I

above ground installation
Basement or cellar, restaurants, community kitchens

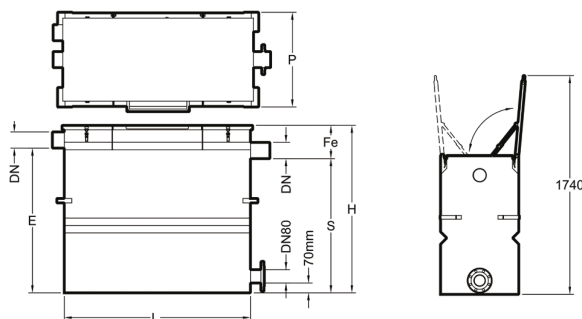

EDGSI range	Nominal size l/s	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Separator Volume
EDGS02I	2	1250	660	1120	970	900	214	110	158	735

Selection table

Canteen	Restaurant	
	1 service/day	2 services/day
≤ 450	≤ 110	≤ 220

Dimensions are in millimetres, weights in kilograms, volumes in litres.