



Sludge traps

Sludge traps



from 340 to 5700 l/s in polyethylene ————— p 64
 10, 15 or 20,000 l/s in polyethylene ————— p 65






Sludge traps

- Tank in recyclable rotomoulded polyethylene with lifting and anchoring rings.
- Operation: traps heavy materials.
- Inlet with nitrile seal.
- PVC outlet sleeve.
- Polyethylene manhole (AD range only).
- **Sphère range:** composite cover.



Sludge traps





YDE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	X1	YC	"Fixed" extension option
YD0340E	1000	1000	1000	670	640	360	110	23	340	585	100	270	PLA13555G PLA13556G



YDE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	"Fixed" extension option	"Adjustable" extension option
YD0660E	1200	1200	1230	840	800	430	110	33	660	585	PLA13555G	-
YD1000E	1200	1200	1540	1150	1110	430	110	49	1000	585	PLA13556G	-
YD1500E	1500	1500	1700	1220	1170	530	110	68	1500	745	-	ETR47EF
YD1900E	1500	1500	1965	1486	1436	529	160	92	1900	745	-	ETR65EF



ADE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	X1	"Adjustable" extension option
AD3000/200E	2292	1500	1730	1200	1180	550	200	140	3000	745	1000	ETR47EF
AD2850/300E	2292	1500	1730	1085	1035	695	315	145	2850	745	1000	ETR65EF

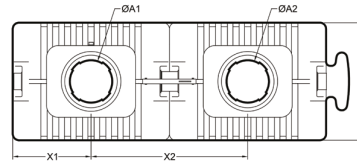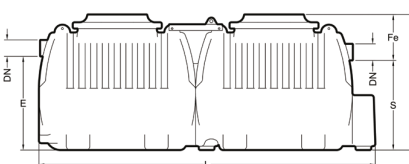

ADE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	ØA2	X1	X2	"Adjustable" extension option
AD6000/200E	4292	1500	1730	1200	1150	580	200	280	6000	745	745	1000	2000	ETR47EF
AD5700/300E	4292	1500	1730	1085	1035	695	315	290	5700	745	745	1000	2000	ETR65EF

options

1. Visual and audible alarm p. 70-71
2. Cylindrical polyethylene extension p.70



Sphère	Aronde
X	X
X	X

Dimensions are in millimetres, weights in kilograms, volumes in litres.





Sludge traps



- Tank in 100% recyclable rotomoulded polyethylene.
- Sludge trap to retrieve heavy materials.
- Polyethylene manholes.
- Operation: traps heavy materials.
- Grease inlet and outlet in PVC or seals in nitrile.

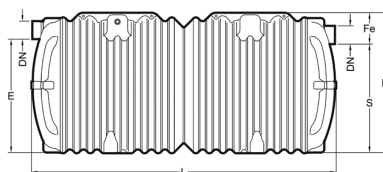

ADE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	ØA2	X1	X2	"Adjustable" extension option ETR47EF ETR65EF
AD10000E	4364	1943	2010	1685	1635	375	200	435	10000	790	790	1230	1900	



ADE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	X1	"Adjustable" extension option ETR47EF ETR65EF
AD13000E	3889	2448	2515	2150	2100	415	200	475	13200	790	1750	

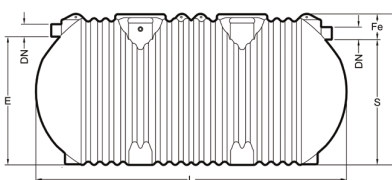

ADE range	L	P	H	E	S	Fe	DN (PVC Ø)	Weight	Sludge trap volume	ØA1	ØA2	X1	X2	"Adjustable" extension option ETR47EF ETR65EF
AD18000E	5204	2448	2515	2150	2100	415	200	651	18700	790	790	1750	1703	

Options

	ADE
1. Visual and audible alarm p. 70-71	X
2. Cylindrical polyethylene extension p.70	X